


# 2 Door Access Control Panel

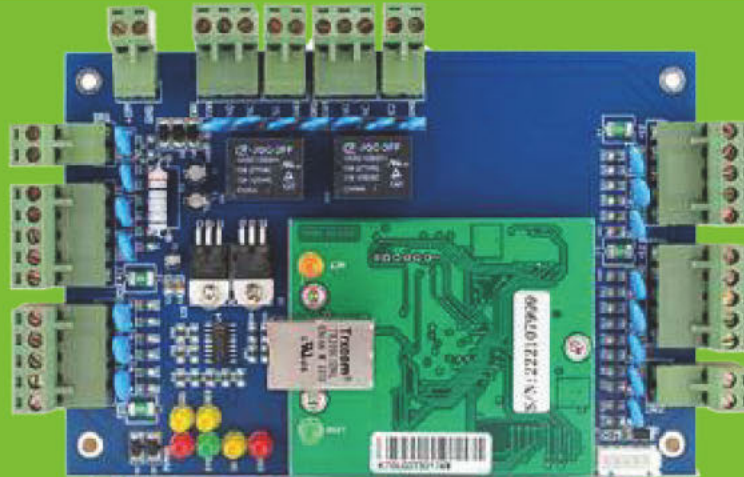

## Specifications

Parameter	Multi Door (2) Control Panel
Communication	TCP/IP 10M/100M adaptive
Description	Control 2 doors, get in and out door by swiping card, or get in by swiping card and get out door by button
Size of PCB board	160mm*106mm
Size of Case	273mm*228mm*65mm
Power Supply	12VDC 4 7A
Power Consumption of Circuit Board	Less than 100mA
Input Format of Reader	Wiegand
Quantity of Readers	4 pcs
Door Controlled	2 doors
Door opening time extending setting	1 600 seconds(adjustable)
Max q' ty of controller	No limit

Operation Temperature	40℃-70℃
Operation Humidity	10-90% RH, No Condensation
Q'ty of users	20,000 Users
Q'ty of Event Buffers (offline)	100,000 event buffers
Power interruption protection measure	High Speed Memory, Records never lose
Max Distance from Reader to Controller	100m (suggestion distance 80m)
Max Distance between Controllers	TCP/IP: Depends on net coverage area
Package included	PCB board, software, manual, certificate, carton
Alarm for long time door open, illegal break in, intimidate	Yes
Fire and alarm linkage	If no connection with the expansion board, only has software interface alarm, and drive the computer speaker. If connected with expansion board, is able to alarm by hardware, if connected with strengthened expansion board, then is able to Security alarm,
Complisive open and close door at long time	Yes
Open door in remote distance	Yes
Inter block	Yes
Anti pass back and tail	Yes
Multi-card open door	Yes
Open long time at specified time	Yes
Electronic map	Yes
Urgency locking	Yes
First card unlocking	Yes
Unlock based on internal and external validation	Yes
Keypad (card+password, supper password)	Yes

