




DX Series Small Zinc Alloy Luminous Exit Button w/ Back Box

Model: ACRE-EB30L


Specs

Operating Voltage	9-13V DC
Material	Zink Alloy
Mechanical Life	1,000,000 Test
Sutable for Door	Hollow Door
Output Contact	COM & NO

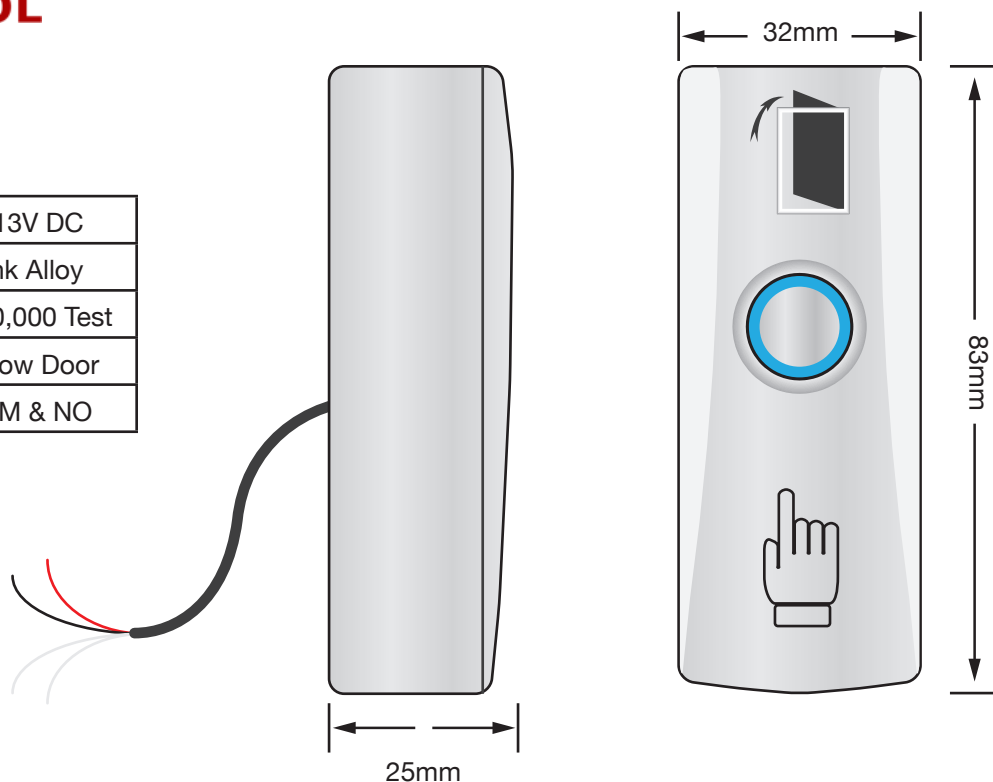

Cable Diagram

- **+12vDC:** This cable is the 12vDC input to provide power to the illumination.
- **GRD:** This cable provides Ground to the illumination.
- **COM:** This cable recive's signal from a device.
- **NO:** This cable sends the signal when the button is pressed.

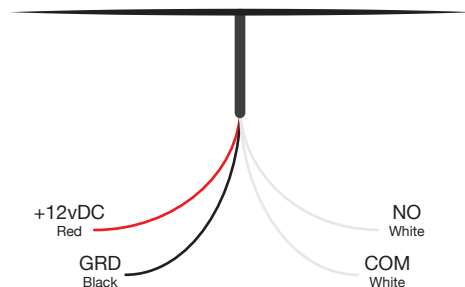

Connecting to DX AC Board

To connect this Push to Exit Button to the DX Access Control board please connect the following wires to the corresponding ports.

White Wire #1 = PX Port **Red** Wire = +12vDC Port

White Wire #2 = GRD Port **Black** Wire = GRD Port

The **Red** and **Black** wires can alternatively be connected to the Access Control power supply directly if preferred.

