


CAT6-CU-1000-RED

CAT6 Twisted Pair Networking Cable



Features:

- PVC Jacket
- Copper-clad aluminium wire
- Available in White/Blue
- Sparker Tested: 1200V
- Cat6 Standard

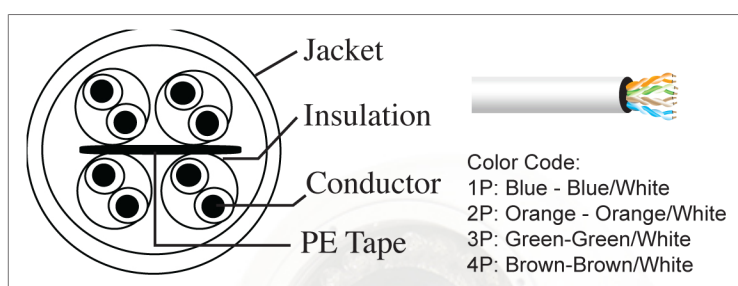

Specification:

ITEM	SPECIFICATION	
CONDUCTOR	AWG	24AWG
	MATERIAL	CCA
	COND.SIZE	1/0.52±0.008mm
INSULATION	LAYER	A layer +Two layer
	MATERIAL	HD-PE+Flame retardant PE
	O D	0.98mm
	NO.	4P
JACKET	MIN.AVG.THICK	0.6 mm
	MATERIAL	PVC
	COLOUR	White/Blue
	OD	6.0±015mm
ELECTRICAL CHARACTERISTICS	Nom. Characteristic Impedance (Ohms)	100+/-15
	Nom. Mutual Capacitance	15 pF/ft
	Nom. Velocity of Propagation (%)	70%
	Nom. Delay	538ns / 100m
	Minimum Return Loss (DB)	19.24
	DC Resistance Unbalance:	3% maximum
	Storage Temperature Range	-4°F - 160°F
	Installation Temperature Range	32°F - 140°F
	Operating Temperature Range	