

## CVICV-TP2-PIR

### 2MP HD-CVI 1080p Covert Motion Detector Camera

- 1/2.8 inch 2 Megapixel CMOS
- 30fps@1080P
- High speed, long distance real-time transmission
- 3.7mm fixed lens
- DC12V




|                       |                                                  |
|-----------------------|--------------------------------------------------|
| Megapixels:           | 2MP                                              |
| Max Resolution:       | 1080p                                            |
| Image Resolutions:    | 2MP (1920x1080) / 720P (1280x720) / D1 (704x480) |
| Image Sensor:         | 1/2.8 inch 2MP CMOS                              |
| Min Illumination:     | 0.01LUX@F1.2(AGC ON)                             |
| LEDs:                 | N/A                                              |
| IR Distance:          | N/A                                              |
| OSD:                  | Yes                                              |
| Operating Temperature | +14°F to +113°F                                  |
| Dimension:            | 2.7 in x 2.1 in x 4.7 in                         |
| Power:                | 12v DC                                           |

# 2 MEGAPIXEL HD CVI CAMERA

## FEATURES



- High performance CMOS image sensor, megapixel definition.
- HD video, coaxial cable to transmit the control signal.
- Support 75-3 coaxial cable transmission without any loss.
- High speed, long distance real-time transmission.
- Support auto exposure, auto white balance, auto electronic shutter and auto gain function.
- Support DC12V power supplying.

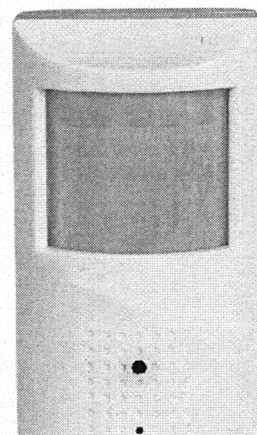

## SPECIFICATIONS

|                        |                                     |                 |
|------------------------|-------------------------------------|-----------------|
| Signal System          | NTSC                                |                 |
| Pixels                 | 1920(H)×1080(V)                     |                 |
| Image Sensor           | 1/2.8" 2 Megapixel CMOS             |                 |
| Electronic Shutter     | 1/50s~1/100,000s                    | 1/60~1/100,000s |
| Video Frame Rate       | 1920x1080@25 fps;1920x1080@30 fps   |                 |
| Synchronization        | Internal                            |                 |
| Min.Illumination       | 0.01Lux@F1.2(AGC ON),0Lux IR LED on |                 |
| Day/Night              | Auto(ICR)/B&W/Color                 |                 |
| Noise Reduction        | 2D/3D                               |                 |
| Lens Focal length      | 3.7mm                               |                 |
| Power Supply           | DC12V                               |                 |
| Mount Type             | M12                                 |                 |
| Power Consumption      | 300mA                               |                 |
| Working Environment    | -30°C~+60°C                         |                 |
| Transmission Distance  | Over 500m via 75-3 coaxial cable    |                 |
| Dimensions(WxDxH)      | 69mm(L)X53mm(W)X120mm(H)            |                 |
| Working temperature    | -10°C~+45°C                         |                 |
| Storage temperature    | -40°C~+80°C                         |                 |
| Video output amplitude | 1.0Vp-p                             |                 |
| Lens Type              | Manual                              |                 |
| Storage humidity       | indoor 85%RH (no condensation)      |                 |
| OSD Menu               | Yes                                 |                 |
| Weight                 | 0.12kg                              |                 |

## DIMENSION

