

Indoor/Outdoor Bullet with Varifocal Lens and IR

Model Number: ELI-AN1-B-80-312R

Key Camera Features

- Super Flux IR LEDs for range up to 35 meters
- Wide dynamic range greater than 100dB
- 2.8~12mm Varifocal Lens
- Full 3-Axis Operation
- Weatherproof IP66
- Medium Bullet



COMPATIBLE BRACKET


ELI-SIP-JunctionRound
(Universal Junction Box for Bullet Cameras)

AN1 Series Analog Cameras

- Advanced Pixel System (APS) uses a special chipset solution with CMOS sensor for super vivid images
- 800 TVL Resolution
- Plug-and-Play for fast setup with no complicated OSD
- 12VDC

Model No.	ELI-AN1-B-80-312R
Video	
Sensor / DSP	1/3" CMOS
Horizontal Resolution	800 TVL
Min. Illumination	0.01 Lux (AGC On, IE Off) / 0 Lux with IR LED On
Effective Pixels	976(H) x 582(V)
IR LEDs	15pcs Super Flux 2.4W Distance 82 feet
Lens	2.8 ~ 12mm Varifocal
Video Output	BNC CONNECTOR 1.0Vp-p PAL/NTSC
S/N Ratio	More than 47db (ACG OFF)
General	
Power	12VDC @ 3.5W(LED OFF)
Temperature	Operating 14°F ~ 131°F (-10°C ~ 55°C) Storage -4°F ~ 140°F (-20°C ~ 60°C) 10% - 85% Relative Humidity
Approvals	CE / FCC / RoHS Compliant / IP66 / IK6
Dimensions	226mm x 77mm (8.9 x 3 inch)
Weight	1.7lbs (800g)

*Specifications are subject to change without notice.

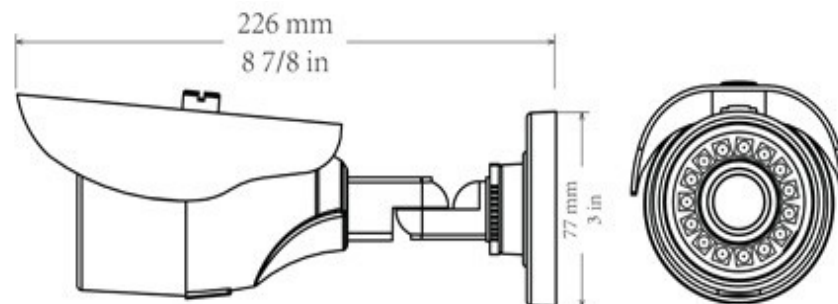

TechProSecurity.com | 866-573-8878