


Indoor-Outdoor AN3 IR Bullet 6-50mm Varifocal

MODEL NUMBER: ELI-AN3-B-70-650R
BRACKETS: ELI-SIP-JunctionBoxRound



Key Features

- 1/3 "SONY Ex-view CCD II, Effio-A
- 700 TVL Resolution
- Smart IR Dot Infrared up to 98-164 feet
- 0.01LUX (infrared light off) 0Lux
- Autoiris Lens 6-50mm
- 2D & 3D DNR
- Motion Detection
- Privacy Masking
- Water proof IP66

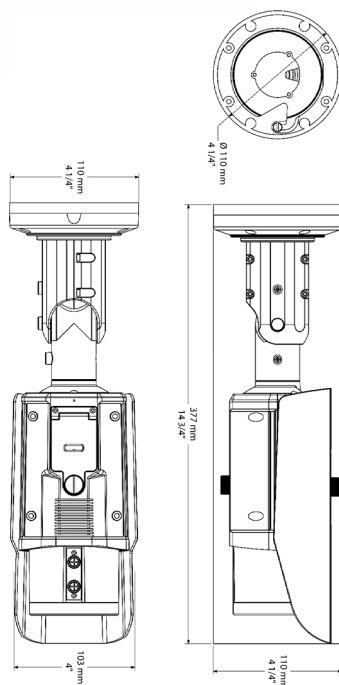

Model No.	ELI-AN3-B-70-650R
Sensor	1/3 "SONY Ex-view CCD II Effio-A
Signal System	PAL or NTSC
Effective Pixels	Effective Pixels
Horizontal Resolution	700TV Lines (Color) / 750TV Lines (black and white)
SNR	≥50dB
Minimum illumination	0.01LUX (infrared light off), 0Lux (infrared light to open)
IR distance	30-50M/ 98-164 feet
Infrared light wavelengths	850nm
Shot	Zoom (f = 6-50mm)
Color to black function	Support with removable IR cut filter
Electronic Shutter	1/50 ~ 1 / 100,000sec (PAL), 1/60 ~ 1 / 100,000sec (NTSC)
Slow shutter frame accumulation	(Digital Slow Shutter) / × 512
SNR	50dB
White balance	Auto White Balance (AWB) / auto-tracking (ATW) / AWC-SET / Manual White
Digital Noise Reduction	2D, 3D digital noise reduction
Automatic Gain	On / Off
BLC	OPEN/CLOSE
Electronic zoom	Off/ x 1~x256
Motion detection	Support, screen prompts and alarm output
Privacy masking	Privacy masking supports 20 regions, each region can be set to any quadrilateral
Synchronous mode	Internal synchronization / Line Lock
Video output	1.0Vp-p, 75 Ohm
OSD	English, Chinese can add other languages (a total of 8 languages)
Power	DC12V / AC24V Infrared Close: 3.5W; IR on: 6W (MAX)
Temperature	-10 C ~ + 55 C(14F~131F) 90% RH MAX (non-condensing) IP66 RATED
Dimensions	265.5 x 69 mm (10 2/5 x 2 3/4 inch)
Weight	0.680KG / 1.496lb

Specifications are subject to change without prior notice.