



Indoor/ Outdoor PRO Bullet Camera Effio-P-Autoiris Starlight

MODEL NUMBER: ELI-AN3-B-70-650RSL
BRACKETS: ELI-SIP-JunctionBoxRound

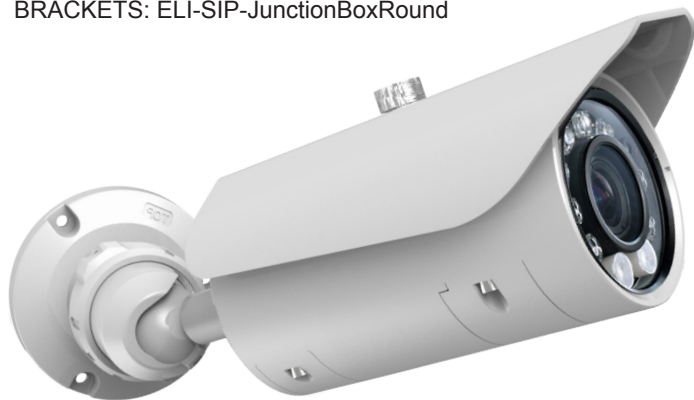

Key Features

- Super low LUX 0.00006
- High Power Super Flux IR LEDs
- Sony 960H double scan CCD + Effico-P
- Autoiris Lens 6-50mm
- True WDR with double scan CCD
- 2D & 3D DNR
- WPC, HLC, BLC, DIS
- E-Zoom and Motion Detection
- Privacy Masking
- Water proof IP66

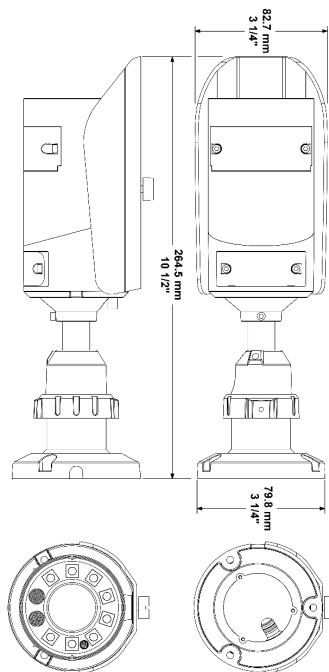

Model No.	ELI-AN3-B-70-650RSL
Camera	
Sensor	1/3" Sony Effio-P CCD
Max Resolution/FPS	>700TVL (B/W) >650TVL(Color)
Min. Illumination	0.03Lux/F1.2 /0.000006Lux Slow Shutter
Day / Night	True Day / Night with ICR Filter.
IR LEDs	25pc Super Flux IR LED 850nm for 35-40 Meters (115 - 131 feet)
Lens	6-50mm Vari-focal IR Corrected
Video Output	Service RCA Video output with IP OSD via bottom access panel
Electronic Shutter	Auto
OSD Functions	
Supported Languages	English, Chinese
Wide Dynamic Range	Super WDR or D-WDR modes, with ATR-EX functions. Clip and Scale user settings.
Digital Noise Reduction	2D and 3D
Display Mirror Flip	Horizontal & Vertical
Privacy Masking	20 User Areas defined quadrangle points. (irregular shaped)
Backlight	BLC / HLC
Additional Notes:	DIS Digital Image Stabilization, E-Zoom for Alarm digital Zoom
General	
Power	12v DC @ 140mA (500mA IR LED On)
Temperature	Operating: 14°F to 131°F (-10°C to 55°C) Storage: -4°F to 140°F (-20°C to 60°C)
Operating Humidity	10% - 85% RH
Approvals	CE / FCC / RoHS Compliant / IP66 / IK5
Dimensions	377 x 110 mm (13 3/4 x 4 1/4 inch)
Weight	1.65kg / 3.63lb

Specifications are subject to change without prior notice.



TechProSecurity.com | 866-573-8878