

# HDCVI Balun Pigtail Used in Pairs ELI-CVI-VBPT

| Model No.             | ELI-CVI-VBPT                             |
|-----------------------|------------------------------------------|
| Connectors            | BNC, screw terminals                     |
| Cable                 | UTP Cat5 / Cat5E / Cat6                  |
| Impedance             | Unbalance 75Ω; Balance 100Ω              |
| Format                | 720P, 1080P for for HDTVI, HDCVI and AHD |
| Signal to Noise Ratio | ≥60dB                                    |
| Tempreature           | -25 degree C +70 degree C                |
| Humidity              | 0 ~<95% (Non-condensation)               |

Specifications are subject to change without notice\*


A passive high definition power and video balun with transmission distances up to 1000 feet for HDCVI.

## Key Features:

- No need to provide power with screw terminals
- Transmit HDTVI signal up to 656 feet, HDCVI Signal up to 1000 feet, AHD signal up to 1000 feet
- Support 720p (25/30 fps) and 1080p (25/30fps)
- Built-in transient protection



## Product Dimenstions

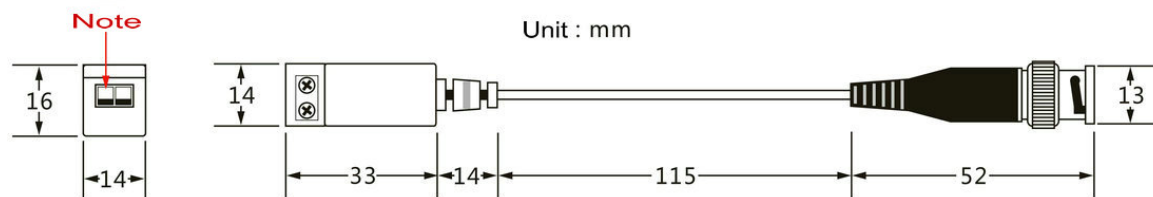


## Installation



TechProSecurity.com | 866-573-8878

This product is not waterproof

# HDCVI Balun Pigtail Used in Pairs ELI-CVI-VBPT

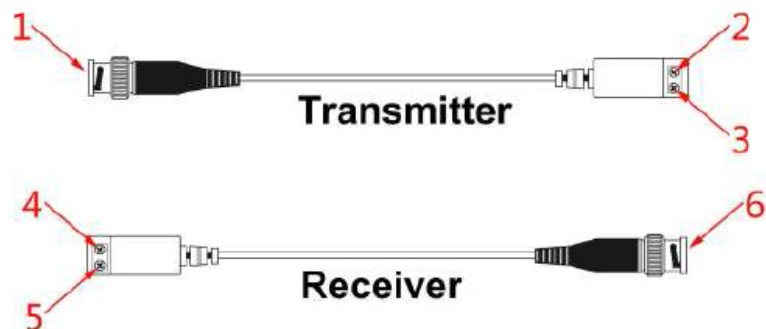

## Installation Instructions

1. Connect video signal to BNC terminal
2. Connect UTP cable to the negative pole (2) of transmitter
3. Connect UTP cable to the positive pole (3) of transmitter
4. Connect UPT cable to the positive pole (4) of Receiver
5. Connect UPT cable to the negative pole (5) of Receiver
6. Connect the video signal of receiver to display device (6)



TechProSecurity.com | 866-573-8878

This product is not waterproof