


6MP 360 ° Fisheye Dome Camera with IR

Key Features: ELI-IP5-D6-360R

- 6MP resolution (3072x2048)
- 360° Panoramic views with 100dB WDR
- 360° De-warping feature from the Camera
- Weatherproof IP66
- Real-time frame rate up to 30fps
- Day/Night with ICR
- 12VDC/PoE
- Cover more area with a single camera

*Specifications are subject to change without Notice.



High Resolution/ 360 De-Warp

Clear, sharp 6MP 100db WDR 360° Fisheye F1.6 Lens for 360° or 180° views. Utilize the De-Warping solution for an all angle view (2048x1024)




Built-in Video Storage

Add Edge recording by installing an SD Card up to 64GB. Free VMS software for accessing in-camera video storage is included.



HIGH POWERED SUPER FLUX LEDs

Equipped with high powered super flux LED's for night vision views upto 33feet (10 meters)

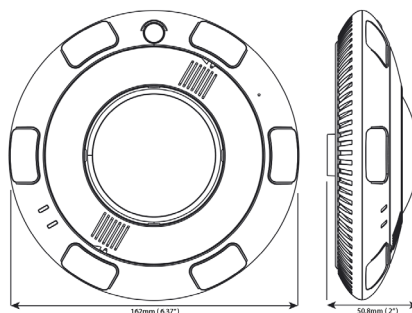

TechProSecurity.com | 866-573-8878



6MP 360 ° Fisheye Dome Camera with IR

Model Number	ELI-IP5-D6-360R
Sensor	CMOS 1/1.8" with 100db WDR
Max Res./ Max Frame Rate	3072(H)*2048(V)/30fp with Fisheye correction
Min. Illumination	0.01 Lux (Color) (0.01Lux B/W) (0 Lux IR LED On)
Camera	
Day / Night	True Day / Night with ICR Filter.
Lens	360° Fisheye F1.6
Field of View (H / V / D)	77° / 54° / 100.2°
IR LED	High Powered Super Flux LEDs 850nm
IR Distance	10 Meters (33 feet)
Video Output	Setup / Service BNC Video supported internal connector with dangle cable
Electronic Shutter	Auto / User 1/5 - 1/50,000 ; 50/60Hz software selectable
Video	
Compression	H-264 High/Main/Base Profile. Stream1 H-264, or MJPEG.
Streaming	Stream1 Full Resolution, Stream2 VGA / D1 / CIF or QCIF selectable
Quality Setting (VBR)	1 - 9 (9 Highest)
I Frame	User selection value
Brightness / Sharpness	Variable 0~100 / 0~100
Gain Control	Auto / Fixed 8~102dB
Orientation	Horizontal Mirror / Vertical Flip
Text Overlay	Time / Date / Camera / Custom OSD
Masking	5 User defined masking areas



Network	
Ethernet	1 Ethernet (10/100 Base-T) RJ45 Connector
TCP/IP	IPv4 / IPv6 (DHCP / Fixed)
Compliance	Onvif v2.2 (Profile S)
RTSP Video	Standard RFC2326, Support Quicktime / VLC Player. User security authentication
Web Language	English, Chinese, Russian, Polish
Recording Simultaneous.	Local Micro SD Memory, Remote FTP server, TCP/UDP CMS, RTSP connection .
Network Protocols:	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, PPPoE, NTP. Unicast and Multicast supported. Video streaming from SDK & NVMS / NVR software or 3rd party applications.
Audio	
Input / Output	Optional Microphone: 1 x RCA Input / 1 x RCA Output @ 1V Line Level
Audio Compression	G711 A-law, G711 u-law , RAW_PCM
General	
Power	12V DC Terminal Input / PoE 802.3af Class 2 4.1W / Max 6.9W (LED On)
Temperature	Operating: 14°F to 131°F (-10°C to 55°C) Storage: -4°F to 140°F (-20°C to 60°C)
Operating Humidity	10% - 85% RH
Approvals	CE / FCC / RoHS Compliant / IP65 / IK10
Dimensions	80 x 54 mm (3.15" x 2.1")

