

Full Body IP Camera



Built-in Video Storage

Add Edge recording by installing an SD Card up to 64GB. Free VMS software for accessing in-camera video storage is included.



High Resolution

Clear, sharp 1080p resolution with WDR. Lens sold separately



eLine's S Series of IP Cameras use the Onvif standard to give end users the greatest flexibility and compatibility in surveillance system components and software.

Read more at www.onvif.org

Key Features:

- Real-time frame rate up to 30 fps
- Day/Night with ICR
- Alarm and Audio Input & Output on Cable
- 12VDC/PoE

Specifications are subject to change.



Model Number	Resolution
ELI-SIP-FB21	1080p (1920x1080)



Free NVMS Software is included




TechProSecurity.com | 866-573-8878

Full Body IP Camera

Model No.	ELI-SIP-FB21
Camera	
Sensor	Sony Exmor 1/2.8"
Max Resolution / FPS	1920 x 1080 / 30fps
Min Illumination	0.1Lux @ F1.2 (Color)
Day / Night	True Day / Night with ICR Filter
Lens	Standard CS Mount lens fitting
Video Output	Rear Mount BNC Video Output with IP Address OSD
Electronic Shutter	Auto / User 1/5-1/50 0000; 50/60Hz software selectable
Parameters	
Compression	H.264 High Profile (Support Baseline Profile) / MJPEG
Bit Rate (DBR/VBR)	Stream1 50Kbps - 12Mbps; Stream2 10Kbps - 6Mbps; Stream3 (Fixed)
Quality Setting	1-9 (9 Highest)
Multi-Streaming	User setting of Stream 1/2 at support Resolutions, Stream3 MJPEG Stream
Brightness / Sharpness	Variable 0~100 / 0~100
Gain Control	Auto / Fixed 8~102db
Orientation	Horizontal Mirror / Vertical Flip
Text Overlay	Time / Date / Camera / Custom OSD
Masking	5 User Defined masking areas < 8% of total picture

Network	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
TCP/IP	IPv4 / IPv6 (DHCP / Fixed)
Compliance	Onvif v2.2 Profile-S Listed
RTSP Video	Standard RFC2326, Support Quick Time / VLC Player. User security authentication (Enabled / Disabled)
Web Language	English, Chinese, Russian, Polish, (European Languages coming 2013)
Recording Simultaneous	Local Micro SD Memory, Remote FTP server, TCP/UDP CMS, RTSP connection (Stream 1, 2 or 3)
Network Protocols	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, PPoE, NTP. Unicast and Multicast supported.
Memory Card Slot	Internal memory card supports Max 64GB. Supports Edge Recording.
Audio	
Input/Output	1 x RCA Input / 1 x RCA Output @ 1v Line Level
Audio Compression	G711 A-Law, G711 U-Law, RAW_PCM
General	
Power	12VDC @ 170mA / PoE Class 3
Temperature / Humidity	Operating -10°C to 55°C; Storage -20°C to 60°C / 10% - 85% RH
Approvals	CE / FCC / RoHS Compliant
Product Dimensions	145 x 64 mm
Product Weight	0.85kg

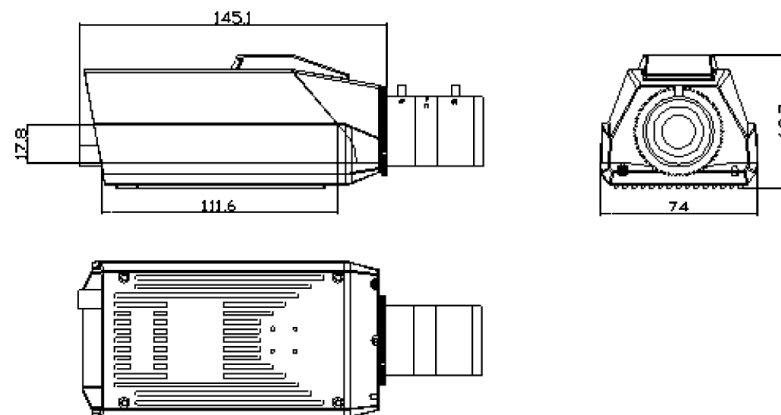

TechProSecurity.com | 866-573-8878