

Outdoor IP Vandal Dome Camera



Built-in Video Storage

Add Edge recording by installing an SD Card up to 64GB. Free VMS software for accessing in-camera video storage is included.



eLine's S Series of IP Cameras use the Onvif standard to give end users the greatest flexibility and compatibility in surveillance system components and software.

Read more at www.onvif.org



High Resolution

Clear, sharp 3MP resolution with WDR. 3.3~12mm varifocal lens. Zoom and focus adjustment knobs under dome.

Key Features:

- Weatherproof IP66 IK10
- Real-time frame rate up to 30 fps
- Day/Night with ICR
- Alarm and Audio Input & Output on Cable
- 12VDC/PoE

Specifications are subject to change.



Model Number	Resolution
ELI-SIP-VD3W-312	3MP (2048x1536) WDR



Free NVMS Software is included




TechProSecurity.com | 866-573-8878

Outdoor IP Vandal Dome Camera

Model No.	ELI-SIP-VD3W-312	
Camera		
Sensor	Aptina 1/3" WDR CMOS	
Max Resolution / FPS	2048x1536 / 30fps	
Min Illumination	0.5Lux @ F1.2 (Color)	
Day / Night	True Day / Night with ICR Filter	
Lens	3.3~12mm Varifocal Auto Iris	
Video Output	Internal Service RCA output for BNC Video with IP Address OSD	
Electronic Shutter	Auto / User 1/5-1/50 0000; 50/60Hz software selectable	
Parameters		
Compression	H.264 High Profile (Support Baseline Profile) / MJPEG	
Bit Rate (DBR/VBR)	Stream1 50Kbps - 12Mbps; Stream2 10Kbps - 6Mbps; Stream3 (Fixed)	
Quality Setting	1-9 (9 Highest)	
Multi-Streaming	User setting of Stream 1/2 at support Resolutions, Stream3 MJPEG Stream	
Brightness / Sharpness	Variable 0~100 / 0~100	
Gain Control	Auto / Fixed 8~102db	
Orientation	Horizontal Mirror / Vertical Flip	
Text Overlay	Time / Date / Camera / Custom OSD	
Masking	5 User Defined masking areas < 8% of total picture	

Model No.	ELI-SIP-VD3W-312	
Network		
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector	
TCP/IP	IPv4 / IPv6 (DHCP / Fixed)	
Compliance	Onvif v2.2 Profile-S Listed	
RTSP Video	Standard RFC2326, Support Quick Time / VLC Player. User security authentication (Enabled / Disabled)	
Web Language	English, Chinese, Russian, Polish, (European Languages coming 2013)	
Recording Simultaneous	Local Micro SD Memory, Remote FTP server, TCP/UDP CMS, RTSP connection (Stream 1, 2 or 3)	
Network Protocols	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, PPoE, NTP. Unicast and Multicast supported.	
Memory Card Slot	Internal memory card supports Max 64GB. Supports Edge Recording.	
Audio		
Input/Output	1 x RCA Input / 1 x RCA Output @ 1v Line Level	
Audio Compression	G711 A-Law, G711 U-Law, RAW_PCM	
General		
Power	12VDC @ 520mA / PoE Class 3	
Temperature / Humidity	Operating -10°C to 55°C; Storage -20°C to 60°C / 10% - 85% RH	
Approvals	CE / FCC / RoHS Compliant / IP66 / IK10	
Product Dimensions	130 x 112 mm	
Product Weight	0.85kg	

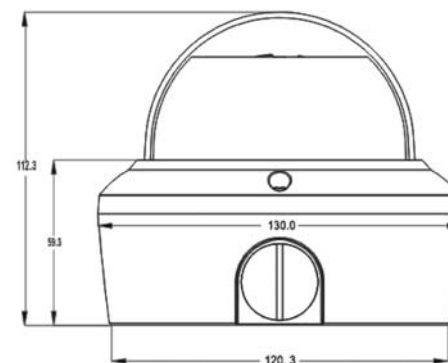

TechProSecurity.com | 866-573-8878