

Outdoor IR IP Vandal Dome Camera

Model Number	Resolution & Options
ELI-SIP-VD5-312R	5MP (2592x1920)



Built-in Video Storage

Add Edge recording by installing an SD Card up to 64GB. Free VMS software for accessing in-camera video storage is included.



eLine's S Series of IP Cameras use the Onvif standard to give end users the greatest flexibility and compatibility in surveillance system components and software.

Read more at www.onvif.org



High Resolution

Clear, sharp 5MP resolution. 3.3~12mm varifocal lens. Zoom and focus adjustment knobs under dome.



Long Range Night Vision

Equipped with 15pcs Super Flux IR LED for a range of up to 10 meters.



Free NVMS Software is included




TechProSecurity.com | 866-573-8878

Outdoor IR IP Vandal Dome Camera

Model No.	ELI-SIP-VD5-312R
Camera	
Sensor	Aptina 1/2.5" CMOS
Max Resolution / FPS	2592x1920 / 10fps
Min Illumination	0.5Lux @ F1.2 (Color) (0 Lux IR LED On)
Day / Night	True Day / Night with ICR Filter
IR LEDs	15 pc Super Flux IR LED 850nm for 10 Meters
Lens	3.3~12mm Varifocal IR Corrected Auto Iris
Video Output	Internal Service RCA output for BNC Video with IP Address OSD
Electronic Shutter	Auto / User 1/5-1/50 0000; 50/60Hz software selectable
Parameters	
Compression	H.264 High Profile (Support Baseline Profile) / MJPEG
Bit Rate (DBR/VBR)	Stream1 50Kbps - 12Mbps; Stream2 10Kbps - 6Mbps; Stream3 (Fixed)
Quality Setting	1-9 (9 Highest)
Multi-Streaming	User setting of Stream 1/2 at support Resolutions, Stream3 MJPEG Stream
Brightness / Sharpness	Variable 0~100 / 0~100
Gain Control	Auto / Fixed 8~102db
Orientation	Horizontal Mirror / Vertical Flip
Text Overlay	Time / Date / Camera / Custom OSD
Masking	5 User Defined masking areas < 8% of total picture

Network	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
TCP/IP	IPv4 / IPv6 (DHCP / Fixed)
Compliance	Onvif v2.2 Profile-S Listed
RTSP Video	Standard RFC2326, Support Quick Time / VLC Player. User security authentication (Enabled / Disabled)
Web Language	English, Chinese, Russian, Polish, (European Languages coming 2013)
Recording Simultaneous	Local Micro SD Memory, Remote FTP server, TCP/UDP CMS, RTSP connection (Stream 1, 2 or 3)
Network Protocols	HTTP, TCP/IP, UDP/IP, RTSP, FTP, DHCP, NTP, PPoE, NTP. Unicast and Multicast supported.
Memory Card Slot	Internal memory card supports Max 64GB. Supports Edge Recording.
Audio	
Input/Output	1 x RCA Input / 1 x RCA Output @ 1v Line Level
Audio Compression	G711 A-Law, G711 U-Law, RAW_PCM
General	
Power	12VDC @ 520mA (IR LED On) / PoE Class 3
Temperature / Humidity	Operating -10°C to 55°C (down to -40°F with heater) Storage -20°C to 60°C 10% - 85% RH
Approvals	CE / FCC / RoHS Compliant / IP66 / IK10
Product Dimensions	130 x 112 mm
Product Weight	0.85kg

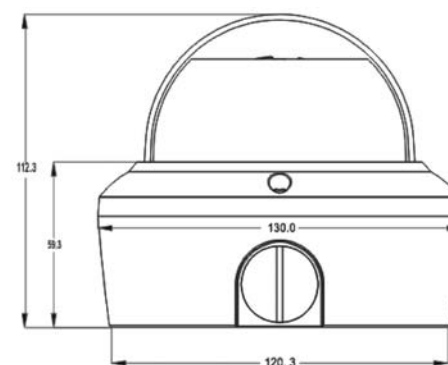

TechProSecurity.com | 866-573-8878