

4K ULTRA HD 8MP Fixed Bullet Camera with IR

Key Features: ELI-SIP2-B8-4R

- Up to 8MP (3840x2160) ULTRA HD 4K
- H.264&MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 4mm Fixed Lens
- Max IR distance up to 98 feet (30 meters)
- IP66 Weather Proof
- Power 12vDC with POE

*Specifications are subject to change without Notice.





High Resolution ULTRA HD

ULTRA High Definition Resolutions settings up to 8MP



HIGH POWERED IR LEDs

Equipped with high powered IR LED's for night vision views upto 98 feet (30 meters)

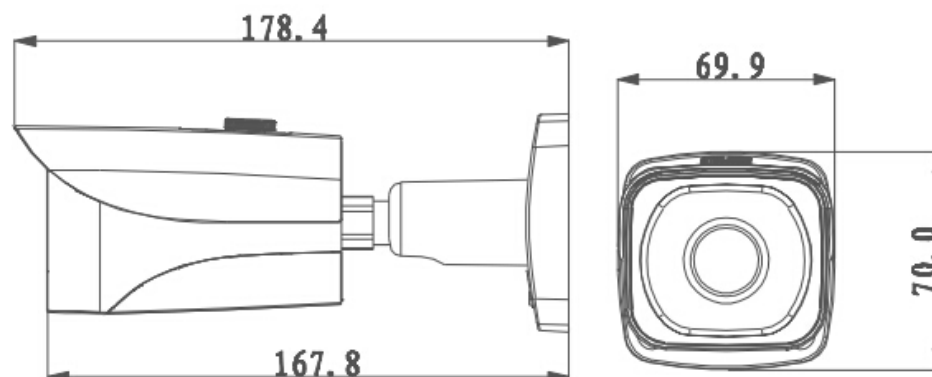

TechProSecurity.com | 866-573-8878



4K ULTRA HD

8MP Fixed Bullet Camera with IR

Model Number	ELI-SIP2-B8-4R
Sensor	1/2.3" 4K progressive scan CMOS
Effective Pixels	3840(H)x2160(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 (4) ~1/10000
Min. Illumination	0.1Lux/F1.6 (Color), 0Lux/F1.6(IR on)
S/N Ratio	More than 50dB
Video Output	N/A
Camera Features	
Max. IR LEDs Length	up to 98 feet (30 meters)
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC/ HLC/DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
Lens	
Focal Length	4mm
Max Aperture	F1.6
Focus Control	Manual
Angle of View	H: 80°
Lens Type	Fixed lens
Mount Type	Board-in Type
Video	
Compression	H.264H/MJPEG/JPEG
Resolution	4K(3840x 2160)/1080P(1920x 1080)/720P(1280x 720)/D1(704x 576/704x 480) /CIF(352x 288/352x 240)
Frame Rate	Main Stream: 4K(1~7fps)/3M/1080P/ (1 ~ 25/30fps) Sub Stream: D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 20K ~ 16Mbps

Audio	
Compression	N/A
Interface	N/A
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility	ONVIF,PSIA,CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<7.5W
Working Environment	-30°C~+60°C, Less than 95%RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	178.4mm× 70mm× 69.9mm
Weight	1.16lbs (528g) with packaging 1.5lbs (683.4g)

