

HDOB-ALS2IRZ

Specifications


2 MP HD Bullet Camera



Features

- 1080P real time image, high resolution, true color
- Support AHD/TVI/CVI/CVBS video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Starlight, true WDR, 3D DNR
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output

Dimensions

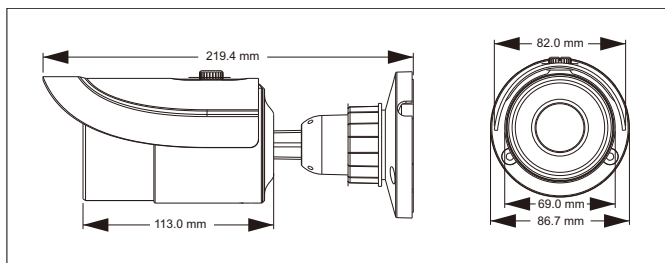

Mounting Accessories



JB-SB301

Specification

HDOB-ALS2IRZ

Camera

Image Sensor	1 / 2.8 "CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	30fps (60Hz), 25fps (50Hz)
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.6 mm (2.8 mm and 2.8~12 mm optional)
Lens Mount	M12 and D14 optional
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP66

Functions

Function Control	OSD (COC Control)
Day & Night	ICR
WDR	Yes (120dB)
Digital NR	Yes
Global Exposure	Yes
Central Exposure	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	Yes
Sharpness	Yes
Smart IR	Yes
Defogging	Yes
HLC	Yes
Image Setting	Yes
Defect Correction	Auto
Language	13 different languages
Angle Adjustment	Any angle

Others

Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ87 x 219