

HDOD-AL5IRZ

Specifications


5 MP HD Dome Camera



Features

- 5MP@20fps/4MP@30fps image, high resolution, true color AHD /
- TVI / CVI / CVBS lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, WDR
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP66 ingress protection
- Support COC

Dimensions

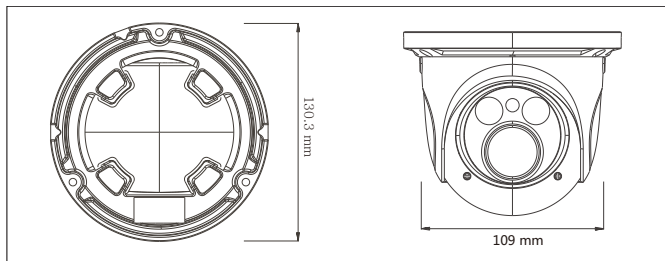

Mounting Accessories



WM-SB204



JB-SB303



JB-SB303+PEN-SB812

Specification

HDOD-AL5IRZ

Camera

Image Sensor	1 / 2.5 "CMOS
Resolution	5MP / 4MP
Image Size	2592 x 1944
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 25s ~ 1 / 100000s (PAL); 1 / 30s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	5MP@20fps/4MP@30fps
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.3 ~ 12 mm
Lens Mount	D14
Lens Adjustment	OSD adjustment
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP66

Functions

Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes (2D DNR)
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Edge Brightness Compensation	Yes
Defogging	Yes
HLC	Yes
Sharpness	Yes
Mirror Image	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto / Manual
Language	English and Chinese
Angle Adjustment	Any angle

Others

Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 3W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ109 x 130