

# HDOD-ALS2IR28

## Specifications


### 2MP HD Dome Camera



#### Features

- 1080P real time image, high resolution, true color
- Support TVI/AHD/CVI/CVBS video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Starlight, WDR, 3D DNR
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 10 ~ 20m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output

#### Dimensions

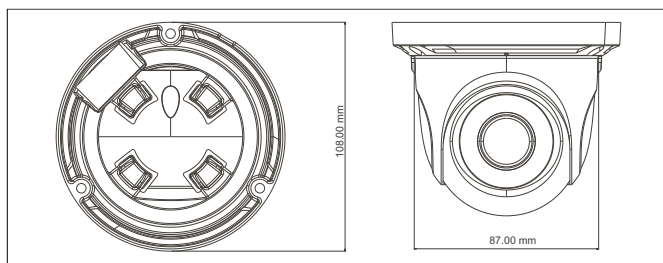

#### Mounting Accessories



JB-SB302



JB-SB302 + PEN-SB811



WM-SB203

#### Specification

##### HDOD-ALS2IR28

| Camera                   |                                                                        |
|--------------------------|------------------------------------------------------------------------|
| Image Sensor             | 1 / 2.8 "CMOS                                                          |
| Resolution               | 2MP                                                                    |
| Image Size               | 1920 x 1080                                                            |
| Video Output             | AHD / TVI / CVI / CVBS                                                 |
| Image System             | PAL / NTSC                                                             |
| Electronic Shutter       | Auto; 1 / 50s ~ 1 / 100000s ( PAL );<br>1 / 60s ~ 1 / 100000s ( NTSC ) |
| IR Distance              | 10 ~ 20 m                                                              |
| Frame Rate               | 30fps ( 60Hz ), 25fps ( 50Hz )                                         |
| Min. Illumination        | Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR                    |
| Lens                     | 3.6 mm ( 2.8 mm optional )                                             |
| Lens Mount               | M12                                                                    |
| S / N Ratio              | ≥52dB ( AGC OFF )                                                      |
| Ingress Protection       | IP66                                                                   |
| Functions                |                                                                        |
| Function Control         | OSD ( COC Control )                                                    |
| Day & Night              | ICR                                                                    |
| WDR                      | Yes ( 120dB )                                                          |
| Digital NR               | Yes                                                                    |
| Global Exposure          | Yes                                                                    |
| Central Exposure         | Yes                                                                    |
| AGC                      | Yes                                                                    |
| Auto White Balance       | Yes                                                                    |
| BLC                      | Yes                                                                    |
| Front Light Compensation | Yes                                                                    |
| Sharpness                | Yes                                                                    |
| Smart IR                 | Yes                                                                    |
| Defogging                | Yes                                                                    |
| HLC                      | Yes                                                                    |
| Image Setting            | Yes                                                                    |
| Defect Correction        | Auto                                                                   |
| Language                 | 13 different languages                                                 |
| Angle Adjustment         | Any angle                                                              |
| Others                   |                                                                        |
| Power Supply             | DC12V ( ± 10% )                                                        |
| Power Consumption        | IR OFF : < 1W; IR ON : < 4W                                            |
| Working Environment      | - 20 °C ~ 50 °C, 10 % ~ 90 % ( relative humidity )                     |
| Dimensions ( mm )        | Φ87 x 108                                                              |