


# 2MP HD Analog IR Dome Camer



- 1080P real-time image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, digital WDR
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP67
- Support COC

## DIMENSIONS

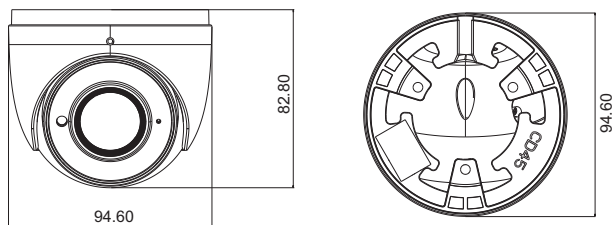

## SPECIFICATIONS

| Model                    |                                                                        |
|--------------------------|------------------------------------------------------------------------|
| Specifications           |                                                                        |
| Camera                   |                                                                        |
| Image Sensor             | 1 / 2.7"CMOS                                                           |
| Resolution               | 2MP                                                                    |
| Image Size               | 1920 x 1080                                                            |
| Video Output             | AHD / TVI / CVI / CVBS                                                 |
| Image System             | PAL / NTSC                                                             |
| Electronic Shutter       | Auto; 1 / 50s ~ 1 / 100000s ( PAL );<br>1 / 60s ~ 1 / 100000s ( NTSC ) |
| IR Distance              | 20 ~ 30 m                                                              |
| Frame Rate               | 30fps(60Hz); 25fps (50Hz)                                              |
| Min. Illumination        | 0 lux (IR ON)                                                          |
| Lens                     | 2.8 mm                                                                 |
| Lens Mount               | M12                                                                    |
| S / N Ratio              | ≥52dB ( AGC OFF )                                                      |
| Ingress Protection       | IP 67                                                                  |
| Functions                |                                                                        |
| Function Control         | OSD ( COC Control )                                                    |
| Day & Night              | ICR                                                                    |
| Digital WDR              | Yes                                                                    |
| Digital DNR              | Yes (2D DNR)                                                           |
| AGC                      | Yes                                                                    |
| Auto White Balance       | Yes                                                                    |
| BLC                      | Yes                                                                    |
| Front Light Compensation | Yes                                                                    |
| Defog                    | No                                                                     |
| HLC                      | No                                                                     |
| Sharpness                | Yes                                                                    |
| Mirror                   | Yes                                                                    |
| Smart IR                 | Yes                                                                    |
| Image Setting            | Yes                                                                    |
| Defect Correction        | Auto                                                                   |
| Language                 | Chinese and English                                                    |
| Angle Adjustment         | Pan: 0°~360°; Tilt: 0°~75°; Rotation: 0°~360°                          |
| Others                   |                                                                        |
| Power Supply             | DC12V ( ± 10% )                                                        |
| Power Consumption        | IR OFF : < 1W; IR ON : < 4W                                            |
| Working Environment      | - 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)                       |
| Dimensions ( mm )        | Φ 94.6 x 82.8                                                          |
| Weight ( net )           | Approx. 0.39KG                                                         |