

IPOD-EL1MPIR50

1.3Megapixel HD Network IR Mini Dome Camera



Features

- 1/3" 1.3Megapixel progressive scan Aptina CMOS
- H.264 & MJPEG dual-stream encoding
- Max 15fps@1.3M(1280×960)&25/30fps@720P(1280×720)
- Day/Night(ICR), 2DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, TechProSS
- 3.6mm fixed lens
- Max. IR LEDs Length 20m
- IP66, PoE

IPOD-EL1MPIR50


Technical Specifications

Model		IPOD-EL1MPIR50	
Camera			
Image Sensor		1/3" 1.3Megapixel Aptina CMOS	
Effective Pixels		1280(H)x960(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual 1/4~1/10000	
Min. Illumination		Color: 0. 1LUX/F1.4, B/W: 0.005LUX/F1.4,0Lux (IR on)	
S/N Ratio		>50dB	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		BLC	
White Balance		Auto	
Gain Control		Auto/Manual	
Noise Reduction		2D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.6mm	
Max Aperture		F1.8	
Angle of View		H: 70°	
Mount Type		Board-in Type	
Video			
Compression		H.264 / MJPEG	
Resolution		1.3M(1280×960) / 720P(1280×720) / D1(704×480) / CIF(352×240)	
Frame Rate	Main Stream	1.3M(1~15fps)/720P(1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate		H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 12288Kbps	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Ver. 2.0	
Max. User Access		10 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
General			
Power Supply		DC12V, PoE (802.3af)	
Power Consumption		<4W	
Working Environment		-10°C~ +60°C, 10%~90%	

IPOD-EL1MPIR50

Ingress Protection	IP66
Dimensions	Φ114 x 86
Weight	288g

Dimensions (mm)

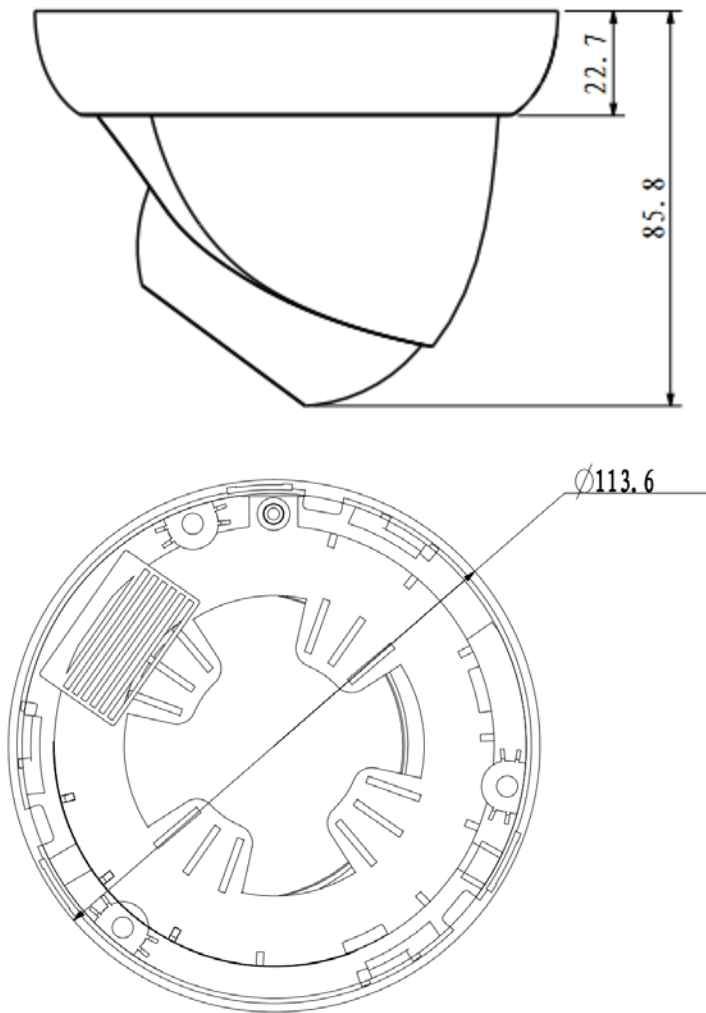

*Design and specifications are subject to change without notice.