


WIRELESS REMOTE RELEASE/BUTTON INSTRUCTION


Wires connection: Firstly ensure the power supply is 12V or 24V before you connect. Then connected as below diagram. Don't mix up + (anode) and - (cathode), otherwise receiver will be burnt down. Current can not exceed 1A when controller is working.

Diagram:


Drawings for Access Control Board

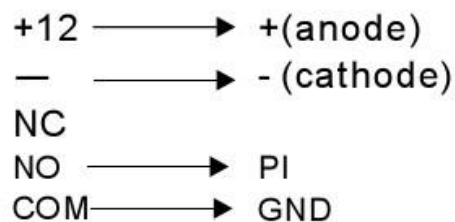

Drawings for With Access Control Power Supply

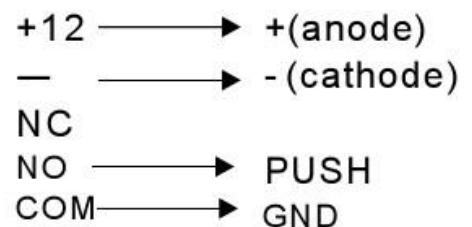

Learn operation way:

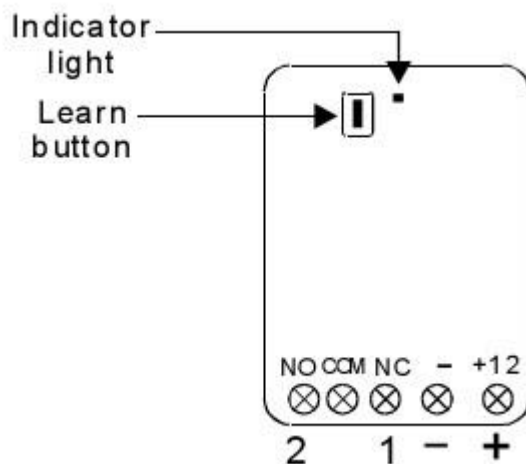

1. Press learn-button for 1-2 sec. Then LED will be off.
2. Press the open or lock key of the new transmitter (only one of them is fine). The red LED will be blink again when succeed. You can add several remote controls as your need.
3. If you want to deleted the transmitter, press the learn button until the red LED blink, all the transmitter will be removed.