

IPVD-EL3MPIR50L2728-W

3MP WDR Ultra-Smart Network Dome Camera



Features

- 1/3" 3 Megapixel progressive scan CMOS
- Support H.264/MJPEG dual codec
- Smart triple streams supported
- Max 25/30fps@3MP(2048x1536)
- Ultra WDR (Wide Dynamic Range) up to 120dB
- Ultra 3D DNR
- Ultra Defog, ROI, EIS
- Smart IR technology
- Smart detection:
 - Face detection
 - Tripwire detection
 - Intrusion detection
 - Scene change detection
- 100/1000M Base-T Ethernet,
- Micro SD memory, IP66, IK10, PoE,

IPVD-EL3MPIR50L2728-W

Technical Specifications


Model		IPVD-EL3MPIR50L2728-W
Camera		
Image Sensor		1/3" 3Megapixel Aptina CMOS
Effective Pixels		2048(H)x1536(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3~1/10000
Min. Illumination		Color: 0. 1Lux/F1.2, B/W: 0.01Lux/F1.2; 0Lux/F1.2(IR on)
S/N Ratio		More than 50dB
Video Output		1 port
Camera Features		
Max. IR LEDs Length		N/A
Day/Night		Auto(ICR)/Color/B/W
Backlight Compensation		BLC / HLC / WDR (120dB)
White Balance		Auto
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
EIS		Support
Ultra Defog		Support
Lens		
Focal Length		2.7 -12mm
Max Aperture		F1.4
Focus Control		Manual
Angle of View		H: 82°~25°
Lens Type		Manual/ Auto Iris(DC)
Mount Type		Board-in Type
Video		
Compression		H.264 / MJPEG
Resolution		3M(2048×1536)/1080P(1920×1080) / 720P(1280×720) /D1(704×576) / CIF(352×288)
Frame Rate	Main Stream	3M(1~20fps)/1080P/720P(1~25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
	Third Stream	1080P/720P/D1(1 ~ 25/30fps)
Bit Rate		H.264: 32K ~ 8192Kbps
ROI		Up to 4 areas
Audio		
Compression		G.711a / G.711u
Interface		1/1 channel In/Out
Intelligent Function		
Smart detection	Tripwire	
	Intrusion	
	Scene change	

IPVD-EL3MPIR50L2728-W

	Missing/Abandoned
	Audio detect
	Face detect
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility	ONVIF, PSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Max 64GB
RS485	N/A
Alarm	1/1 channel In/Out
PIR Sensor Range	N/A
General	
Power Supply	DC12V/AC24V, PoE(802.3af)
Power Consumption	Max 8W (IR on: +2W)
Working Environment	-20°C~+60°C , Less than 90%RH
Ingress Protection	IP66
Vandal Resistance	IK10
Dimensions	Φ151mm×119mm
Weight	1.25kg

IPVD-EL3MPIR50L2728-W

Dimensions (mm)

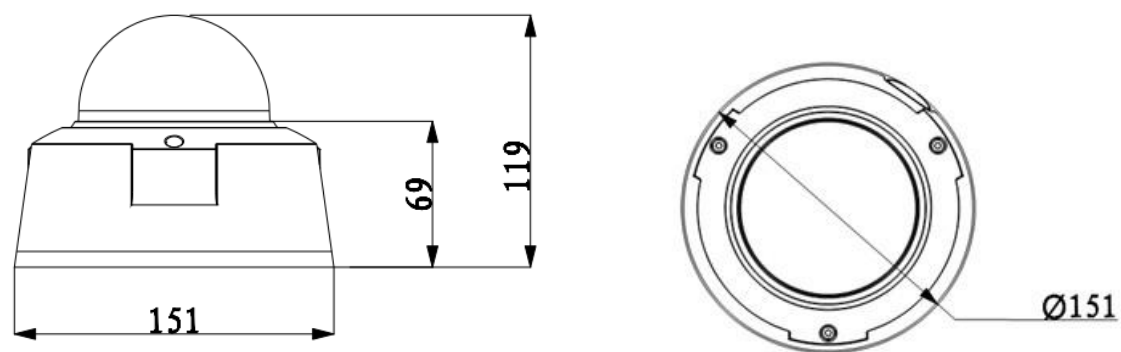

Accessories (optional)