

SDI Dome Camera

Features

2.1 Mega Pixel, 1/3" Panasonic CMOS Sensor (MN34041)

DSP Eyenix EN773A

1080p(1920x1080)@30/25fps


Support WDR, 3D-DNR

Defog: Use this function in the fog weather

OSD menu, Motion detection, Privacy Zone, HLC, BLC

TV Out(BNC) with NTSC/PAL Selectable

Dual Output-Megapixel HD-SDI(BNC)&CVBS:1.0 Vp-p 75ohm

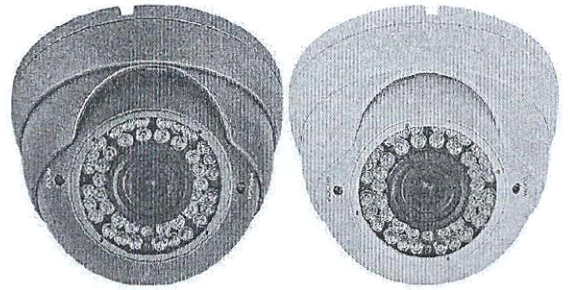

Specifications

Camera	
Image Sensor	2.1 Mega Pixel, 1/3" Panasonic CMOS Sensor
Effective Pixel	1944(H) x 1092(V)
Min. Illumination	0.2 Lux(Color/Day) 0.01Lux(B/W)
OSD	Yes
WDR (Long and Short exposure)	OFF/ON(Level Adjustable)
3D-DNR	OFF/ON(LOW/MIDDLE/HIGH)
Defog	OFF/ON
Sens-Up	OFF/ON
White balance	AWB/ATW/PUSH/MANUAL
Video output	HD-SDI(SMPTE 292M compatible) / CVBS:1.0 Vp-p Composite Signal (75ohm)
B.L.C. control	OFF/ON
D-ZOOM	1.0x - 8.0x
TV system	PAL/NTSC
Electronic Shutter	AUTO/MANUAL/FLK
Lens	
Lens	3.6mm/6mm/8mm/2.8-12mm
General	
IR	42IR
IR Distance	25-30m
Power Supply	DC12V
Power Consumption	500mA
Working Temperature	-10°C~+50°C

Dimensions (mm)

