

NVR-ELE8M-8P4KS2V2

8 Channel 4K PoE NVR



System Overview

The NVR-ELE8M-8P4KS2V2 supports resolutions up to 8MP, delivering 4K quality video streams for your security and convenience. 8 built-in POE ports make it easy to quickly set up our Elite IP cameras with the recorder, simplifying installation and saving money. The built-in PoE supports up to 25.5W max output per port (total 117W) making it fully compatible with all our PoE+ enabled PTZs along with standard PoE cameras.

Features

Perimeter Protection

Perimeter Protection functions significantly improve accuracy. Perimeter Protection reduces false alarms and decreases pixel count requirements for object detection. Perimeter Protection features custom tripwires based on object type for automation in limited access areas such as pedestrian or vehicle-only zones. This combination of advanced AI analytics and real-time alerts to a desktop or a mobile client reduces system requirements as well as resources, resulting in greater surveillance system efficiency.

Face Detection

Whether you wish to recognize, identify or verify a person, a camera with facial recognition software is an efficient solution. It can help you improve customer service and protect your assets by identifying important customers or potential perpetrators.

SMD Plus

SMD Plus, referred to as Smart Motion Detection Plus, is an upgraded version of SMD that greatly improves the alarm accuracy by loading a deep-learning algorithm. It analyzes person and vehicle shapes based on motion detection and sends alarms only when a person or vehicle intrudes.

- Simultaneous video output on HDMI & VGA
- Supports Smart H.264+ and Smart H.265+
- Max decoding capability: 8 × 1080p@30 fps
- P2P remote surveillance with mobile device
- Supports remote configuration



People Counting

This feature counts the number of people that go in a specified region and the number of people that come out. This is perfect for businesses, banks and anybody who wants to monitor the amount of people coming and going.

SMART H.265+

Smart H.265+ technology is a collection of intelligent encoding algorithms based on H.265. To meet the characteristics of video surveillance, Smart H.265+ adopts some key video encoding techniques can be flexibly added and deleted or combined according to different applications and products. Smart H.265+ codec can effectively enhance video encoding efficiency according to the characteristics of different surveillance environments; furthermore, it can greatly reduce transmission bit rate, storage capacity to improve the overall system.

Technical Specification

System

Main Processor	Industrial-grade embedded processor
OS	Embedded Linux
Operation Interface	Web/operating in local GUI

Perimeter Protection by Camera

Performance	8 channels
AI Search	Search for pictures by channel, time and event type

Face Detection by Camera

Performance	4 channels
Face Attributes	6 attributes: Gender, age, glasses, expression, mouth mask, and beard
AI Search	Search for pictures by channel, time and face attributes

SMD Plus by Camera

Performance	8 channels
AI Search	Search by target classification (human, vehicle)

Video

Access Channel	8
Network Bandwidth	Access: 160 Mbps; Storage: 160 Mbps; Forward: 64 Mbps
Resolution	8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1
Decoding Capability	8 × 1080p@30 fps
Video Output	1 × VGA output, 1 × HDMI output, supports simultaneous video sources output for VGA and HDMI
Multi-screen Display	1, 4, 8, 9 views
Third-party Camera Access	ONVIF; RTSP

Compression

Video	Smart H.265/H.265/Smart H.264/H.264/MJPEG
Audio	PCM/G711A/G711U/G726/AAC

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search (Support Dahua IP camera; DVR; NVS; etc.); P2P; auto register
Mobile Phone Access	Android; iOS
Interoperability	ONVIF(profile T/S/G); CGI; SDK
Browser	Chrome; IE9 or later; firefox

Record Playback

Multi-channel Playback	Up to 8 channels for playback
Record Mode	Manual record; alarm recording; SMD recording; smart recording
Storage	Local HDD; network
Backup	USB storage device

Playback Function	1. Play/pause/stop/slow/quick/backward/by frame 2. Full screen, backup (video clip/file), partial zoom in, and audio on/off
-------------------	--

Storage

Disk Group	Yes
------------	-----

Alarm

General Alarm	Motion detection, privacy masking, video loss, scene changing, PIR alarm, IPC external alarm
Anomaly Alarm	Camera disconnection, storage error, disk full, IP conflict, MAC conflict, login locked, and cybersecurity exception
Intelligent Alarm	Face detection, perimeter protection (intrusion and tripwire), IVS, people counting, heat map, and SMD alarms
Alarm Linkage	Recording, snapshot, audio, buzzer, log, preset, and email


External Port

Audio Input	1 × RCA input
Audio Output	1 × RCA output
HDD	2 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature
Alarm Input	4
Alarm Output	2
USB	2 (1 × front USB2.0; 1 × back USB2.0)
HDMI	1 (supports up to 4K resolution output)
VGA	1
Network	1 × RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
PoE	8


General Parameter

Power Supply	100 V–240 V, 47 Hz–63 HZ, 3.5 A
Power Consumption	< 10 W (HDD not included, idling) Total output power of PoE is 117W, the maximum output power of a single port is 25.5W
Net Weight	2.51 kg (5.53 lb)
Gross Weight	3.79 kg (8.36 lb)
Product Dimensions	375 mm × 327.4 mm × 53.8 mm (14.76" × 12.89" × 2.12") (W × L × H)
Package Dimensions	170 mm × 449 mm × 421 mm (6.69" × 17.68" × 16.57") (W × L × H)
Operating Conditions	–10 °C to +55 °C (+10 °F to +131 °F)
Storage Conditions	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	10%~93%
Storage Humidity	30%~85%
Operating Altitude	3000 m (9842.52 ft)
Installation	Desktop mounted
Certifications	CE: EN62368-1; EN55032, EN55024, EN55035, EN61000-3-2, EN61000-3-3 EN50130-4 FCC: Part 15 Subpart B

Dimensions

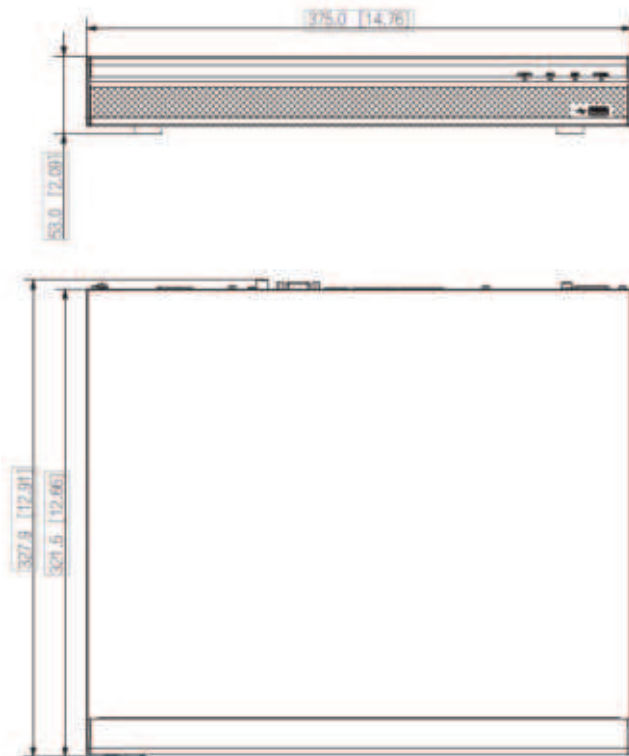

Rear Panel

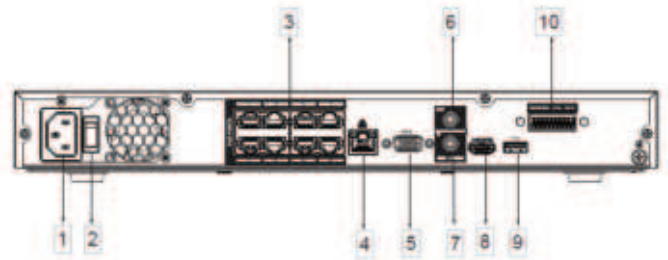

- | | | | |
|---|------------------|----|--------------------|
| 1 | Power Input Port | 2 | Power Switch |
| 3 | PoE Ports | 4 | Network Port |
| 5 | VGA Port | 6 | Mic Out |
| 7 | Mic In | 8 | HDMI Port |
| 9 | USB Port | 10 | Alarm Input/Output |