


NVR-PRE8M-P

8 Channel 1U Prime Series NVR with 8 POE

- Up to 5 Megapixels resolution recording
- HDMI and VGA output up to 1080P resolution
- Up to 2 SATA interfaces
- Plug & Play with up to 8 PoE ports

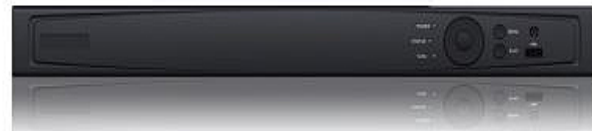

Recording Speed: Max 80Mbps

Resolution: 5MP (2560x1920) / 3MP (2048x1536) / 1080P (1920x1080) / 720P (1280x720) / D1 (704x480)

Drive Capacity: 2 SATA

Video Inputs: 8

Ethernet Ports: 1

Video Outputs: VGA / HDMI

Audio Inputs: 1

Audio Outputs: 1

Alarm Inputs: 4

Alarm Outputs: 1


Internal DVD Burner Support: No

Smart Phone Access/Push Notification: Yes

Motion Activated Recording: Yes


PTZ Control: Yes

Simultaneous Remote Users: 128

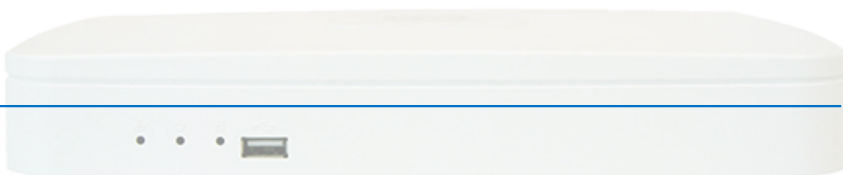

NVR-PRE8M-P


8CH NVR

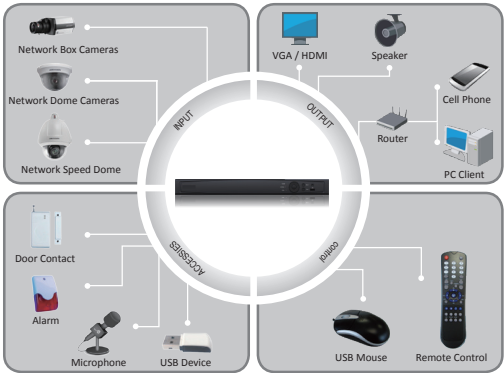

Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- HDD quota and group management
- 8 independent PoE network interfaces are provided

Dimensions

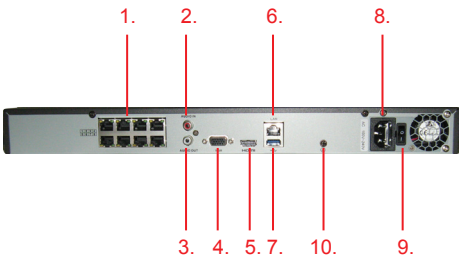

1. Network Interfaces with PoE function
2. Audio In
3. Audio Out
4. VGA Output
5. HDMI Interface
6. LAN Network Interface
7. USB Interface
8. Power Input
9. Power Switch
10. GND

Specifications

NVR-PRE8M-P	
Video/Audio input	
IP video input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	80Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio output	
Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame rate	Main stream: 50 fps (P) / 60 fps (N)
	Sub-stream: 50 fps (P) / 60 fps (N)
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view / Playback resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	8-ch @ 720P, 6-ch @ 1080P
Hard disk	
SATA	2 SATA interface for 2 HDDs
Capacity	Up to 4TB for each disk
External interface	
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB interface	1 × USB 2.0 and 1 × USB 3.0
PoE	
Interface	8 independent 100 Mbps PoE network interfaces
Max. Power	120W
Supported standard	AF and AT
Others	
Power supply	220V AC
Consumption (without hard disk)	≤ 10W
Working temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working humidity	10 % ~ 90 %
Chassis	19-inch rack-mounted 1U chassis
Dimensions (W × D × H)	445 × 290 × 45mm (17.5 × 11.4 × 1.8 inch)
Weight (without hard disk)	≤ 1 Kg (2.2 lb)

Design and specifications are subject to change without notice.