

NVR-PRE8M


Prime 8CH 1U Network Video Recorder NVR

- Up to 5MP resolution recording
- HDMI and VGA output at up to 1920×1080P
- Up to 2 SATA interfaces
- 8-ch network cameras can connect with 50Mbps input



Recording Speed:

Resolution:	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Drive Capacity:	2 SATA
Video Inputs:	8
Ethernet Ports:	1
Video Outputs:	HDMI / VGA
Audio Inputs:	1
Audio Outputs:	1
Alarm Inputs:	N/A
Alarm Outputs:	N/A
Internal DVD Burner Support:	N/A
Smart Phone Access/Push Notification	Yes
Motion Activated Recording:	Yes
PTZ Control:	Yes
Simultaneous Remote Users:	128

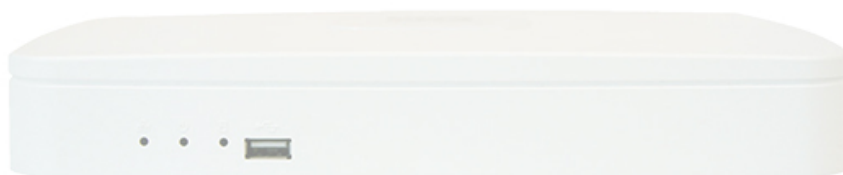


NVR-PRE8M

8CH 1U Network Video Recorder

NVR-PRE8M	
Video/Audio input	
IP video input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1KΩ)
Network	
Incoming bandwidth	50Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio output	
Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame rate	Main stream: 50 fps (P) / 60 fps (N)
	Sub-stream: 50 fps (P) / 60 fps (N)
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view / Playback resolution	6MP/5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	8-ch@720P, 6-ch@1080P
Hard disk	
SATA	2 SATA interface for 2 HDDs
Capacity	Up to 4TB for each disk
External interface	
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB interface	1 × USB 2.0 and 1 × USB 3.0
Others	
Power supply	12V DC
Consumption(without hard disk)	≤ 10W
Working temperature	-10 °C ~ +55 °C (+14 °F~ + 131 °F)
Working humidity	10 % ~ 90 %
Chassis	1U chassis
Dimensions(W × D × H)	315 × 230 × 45 mm (12.4 × 9.0 × 1.8 inch)
Weight(without hard disk)	≤ 1 kg

Rear Panel of NVR-PRE8M

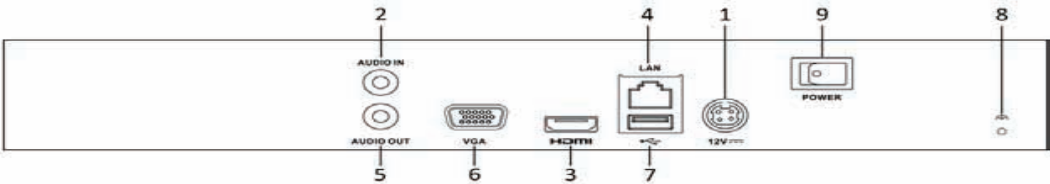

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch