




Features

- Support /128CH 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF IP input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor/ POS / AI recording
- Playback: 16 CH simultaneous playback
- Search: time slice, time, event, tag, smart and target database search
- Support face detection and comparison
- Support multiple VCA (Video Content Analytics) events, such as region intrusion, tripwire, etc.
- Support OS information overlay on live view and playback
- Support RAID 0, 1, 5, 6, 10
- Express and flexible backup via USB, network and so on
- Preview, record, playback, backup and remote access are supported
- DHCP, DDNS, PPPoE network protocol, etc.
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 8K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QR Code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

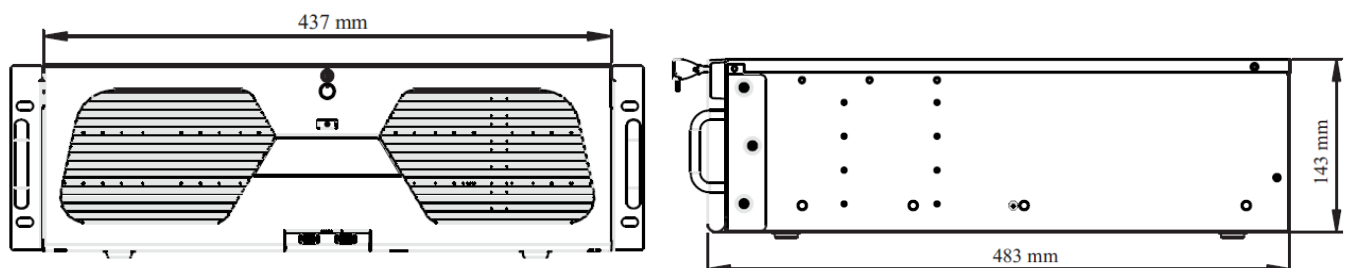

128 Channel NVR

Specifications

System	OS	Embedded Linux
Video	IP Video Input	128CH
	Network Bandwidth	Incoming: 768Mbps Outgoing: 768Mbps
	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Output	HDMI1: 7680×4320@60, 7680×4320@30, 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 (When the resolution of HDMI1 output is 8K, HDMI2 is unavailable and the maximum resolution of HDMI3 output is 1920×1080) HDMI2: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 HDMI3: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 HDMI4: 1920×1080, 1280×1024, 1024×768 VGA×1: 1920×1080, 1280×1024, 1024×768 (VGA and HDMI1 output the same video source)
	Multi-screen Display	Main output: 1/4/6/8/9/13/16/25/32/36/64 AUX output 1: 1/4/6/8/9/13/16/25/32/36 AUX output 2: 1/4/6/8/9/13/16 AUX output 3: 1/4/6/8/9/13/16 Max. 132(64+36+16+16)
	Compression	H.264/H.265/H.265+/H.265S
Audio	Network input	128CH
	Local Input	RCA×1 (for two-way talk)
	Local Output	RCA×1
	HDMI Audio Output	Support
	Compression	G.711(U/A)
Record	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Frame Rate	N:30fps; P:25fps
Playback	Simultaneous Playback	16CH
	Search	Time slice/time/event/tag/smart search
	Function	Play, pause, FF, Rewind, digital zoom, previous frame, next frame, etc.
Decoding Capability	Live View	1CH 16MP@30 / 4 CH 12MP(only available for main output)
	Playback	1CH 16MP@30 / 4CH 8MP(only available for main output)
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	24CH
	Output	8CH
	Triggering	Record, snapshot, preset, e-mail, etc.
Face	Face Detection Performance (AI by IPC)	128CH
	Face Detection Performance (AI by Device)	4CH(4MP)
	Face Match Performance	16CH
	Comparison Capability	36 pictures/second
	Face Picture Database	32 libraries 10000 face pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import

128 Channel NVR

	Face Comparison	Picture	Supports successful face recognition alarm and stranger match alarm
	Track		Track display on a map
	Statistical Graph of Information		Bar graph
	Statistical Mode of Information		Statistics by day, week, month, quarter as well as customized time period
Perimeter Protection	Human/Vehicle Classification (AI by IPC)		128CH
	Human/Vehicle Classification (AI by Device)		8CH(2MP)
Video Metadata	Human/Vehicle Attribute Analysis (AI by IPC)		Yes
Other Functions	Fisheye		Supports fisheye dewarping via NVR/Web Client/mobile APP
	Plate Recognition (AI by IPC)		Yes
Network	Protocol		TCP/IP, HTTP, HTTPS, 802.1x, FTP, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, IPv4, UDP, WebSocket, PPPoE, SNMP, IGMP
	Interface		RJ45 10/100/1000Mbps ×2
	Client Connection		Max. 128 users access
Mobile Device	OS		iOS, Android
Storage	HDD Interface		SATA × 16, max 10TB per HDD
	RAID Type		RAID0,1,5,6,10
	E-SATA Interface		2
Port	USB		USB3.0 × 1; USB2.0 ×3(Front:2);
	RS485		Yes (full-duplex), connect to PTZ or keyboard
	RS232		Yes
	Reset		Yes
	Remote Controller		No
Others	Power		ATX-275W
	Consumption		≤50W (without HDD)
	Dimensions		437 × 483 × 143mm
	Certificate		CE,FCC
	Environmental Protection		Directive EU RoHS, WEEE(2012/19/EU) , Directive 94/62/EC and REACH(EC1907/2006)
	Working Environment		-10~50°C; Humidity: 10%~90%

Rear Panel

