

DATASHEET

NVR-SB32-16P


32 Channel NVR




Characteristics

- Support 32 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- 16 PoE network ports, support IPC direct connection to NVR; support PoE power supply
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

Dimensions

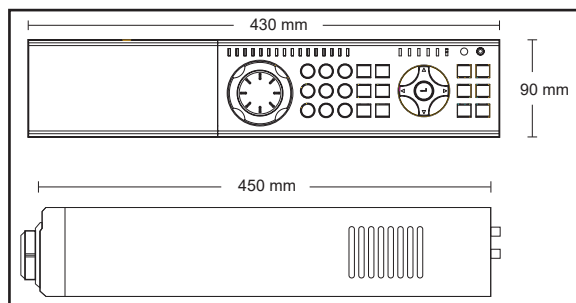

Rear Panel

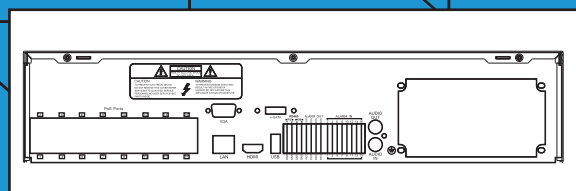

Specifications

NVR-SB32-16P		
System	Compression	Standard H.265
	OS	Embedded Linux
Video	Network Input	32 CH IPC input
	Network Access Bandwidth	256Mbps
	Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
	Output	HDMI × 1 : 4K × 2K / 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024
Audio	Network Input	32 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
Record	Record Stream	Dual stream recording
	Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P
	Mode	Manual, timer, motion, sensor
Playback	Simultaneous Playback	Max 16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception
	Input	16 CH local alarm input, support IPC alarm input
	Output	4 CH
	Triggering	Record, snap, preset, e-mail, etc.
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 1
	PoE Port	RJ45 × 16
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	Web Client	Max 10 users online
Mobile Device	OS	iOS, Andriod
Storage	HDD	SATA × 8, e-SATA × 1, max 6T per HDD
	Local Backup	U disk, USB mobile HDD
Backup	Network Backup	Yes
	USB	USB 2.0 × 1 (front panel), USB 3.0 × 1 (rear panel)
Port	Remote Controller	Yes
	Power Supply	ATX
Others	Consumption	≤ 15W (without HDD)
	Dimensions (mm)	430 × 450 × 90 (W × D × H)
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity