

NVR-SB32M: Specifications


32ch Sibell NVR 2HDD




Key Features:

- Supports 32ch 1MP(720p) - 8MP IP Inputs
- H.265 high profile compression format
- Intuitive, user-friendly GUI with Modular Design
- Recording Modes in Manual, motion, sensor or timer
- 16 ch Simultaneous playback
- Search video: Time Slice, Time, Event or Tag Search
- Express backup options
- Remote Monitoring via Browser or CMS
- Mobile Viewing Via Sibell Mobile App on IOS & Android
- NAT function & QRCode scan to set up mobile viewing

Dimensions:

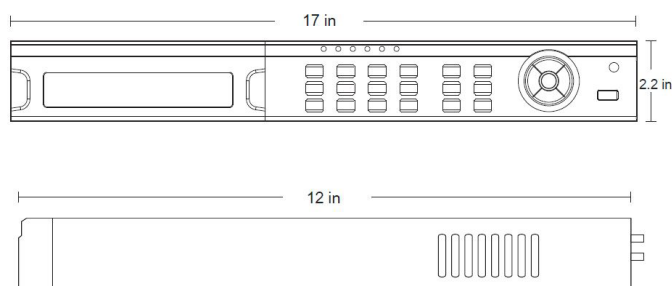

Rear Panel

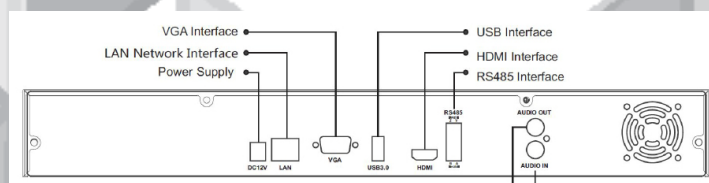

Model#: NVR-SB32M		
System	Compression	Standard H.265
	OS	Embedded Linux
Video	Network Input	32 CH IPC input
	Bandwidth	256Mbps
	Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
	Output	HDMI x 1: 4K x 2K/ 1920 x 1080 / 1280 x 1024 VGA x1: 1920x1080/ 1280 x 1024
Audio	Network Input	32 CH IPC audio input
	2-way Audio	RCA x 1
	Local Output	RCA x 1
Record	Record Stream	Dual stream recording
	Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P
	Mode	Manual, timer, motion, sensor
Playback	Simultaneous Playback	Max 16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception
	Input	Support IPC alarm input
	Output	Support IPC alarm output
	Triggering	Record, snap, preset, e-mail, etc.
Network	Interface	RJ45 10 / 100 / 1000 Mbps x 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	Web Client	Max 10 users online
Mobile Device	OS	IOS, Android
Storage	HDD	SATA x 2, max 6TB per HDD
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	USB	USB 2.0 x 1 (front panel), USB 3.0 x 1 (rear panel)
	Remote Controller	Yes
Others	Power Supply	DC 12V
	Consumption	≤ 15W (without HDD)
	Dimensions	17 x 12 x 2.2 (W x D x H) in
	Environment	-10 °C ~ 50 °C 10% ~ 90% humidity