


OB-CM1200IRVW

1200 TVL Outdoor Varifocal Bullet Security Camera

- Weatherproof IR camera with 3-Axis Bracket
- IR LED: 42PCS, 100ft
- Water resistance: IP66 Cable built-in bracket
- Lens: 2.8-12 Manual Zoom



TV Lines:	1200
Image Sensor:	CMOS
Min Illumination:	Under 10 Lux By CDS
LEDs:	42 pcs.
IR Distance:	100ft
OSD:	N/A
Operating Temperature	+14F to +122
Dimension:	10.2 x 4.4 x 3.3
Power:	12v DC

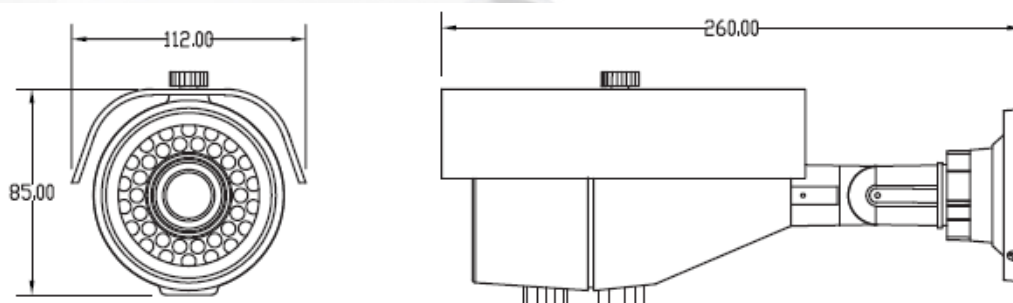

--	--

Camera	
CCD/CMOS	CMOS
Image Sensor	HS1200
DSP	FH8526
Horizontal Resolution	1200TVL
Effective Pixels	1296(H)X964(v)
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/50-1/100, 000Sec; NTSC 1/60-1/100, 000Sec
Sync System	Internal
Usable Illumination	0.01Lux/F2.0
S/N Ratio	≥44dB
Gamma Correction	0.45
Scanning System	PAL:625 Lines, 50 Field/Sec;NTSC:525 Lines, 60 Field/Sec
Video Output	Composite Signal (1.0Vp-p, 75Ω)

Lens	
Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Manual
Auto Iris Support	NO

Night Vision	
Infrared LED	42PCS
Infrared Distance	40M
IR Status	Under 10 Lux By CDS
IR Power On	CDS Auto Control

Camera Features	
Day/Night	Color/ B&W
OSD Menu Language	NO
Defog	NO
Sense-up	NO
Smart-IR	NO
Wide Dynamic Range	NO
Backlight Compensation	NO
White Balance	AUTO
Gain Control	AUTO
Noise Reduction	2DNR
Privacy Masking	NO
Digital Zoom	NO
Picture Adjustment	NO
UTC Support	NO

General	
Weatherproof Housing	YES, IP66
Anti-cut Bracket	YES, 3-Axis
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Storage Temperature	-20℃ ~ +60℃ RH95% Max
Power Source	DC12V±10%,700mA
Dimension	260(W) x112(H) x85(D)mm
Weight	1.4Kg