

QDVR-SBE8ME

Specifications


8ch Sibell DVR




Characteristics

- 8 CH TVI / CVI / AHD video input
- 8 CH 1080P / 1080P lite / 720P / WD1 recording
- 8 CH DVR supports 1 CH IPC 3MP / 1080P / 960P / 720P recording
- Adopt standard H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 8 CH simultaneously playback
- Search: time slice, time, event (manual, sensor, motion), tag search Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access DHCP,
- DDNS, PPPoE network protocol, IE browse and CMS supported Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device Multi-user online simultaneously
- Authorization management, log review and device status review
- HDMI 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises Support
- NAT function and QRCode scanning by mobile phone and PAD Powerful smart phone & Pad surveillance with iOS and Andriod OS

Dimensions

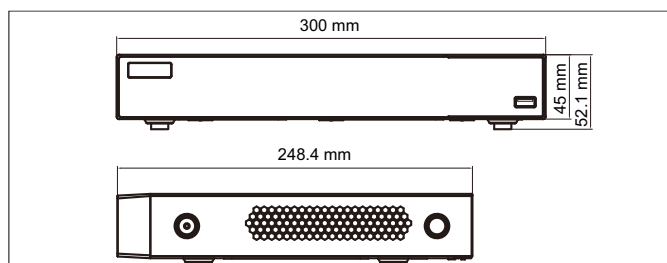

Rear Panels



Specification

QDVR-SBE8ME		
System	Compression	Standard H.264 High Profile
	CPU	Cortex A7
	OS	Embedded Linux
Video	Input	BNC × 8
	Resolution	TVI / CVI / AHD 1080P, 720P, WD1 real time
	IP Input / Access Bandwidth	IPC × 1 / 6Mbps
	Output	HDMI × 1 : 1920 × 1080, VGA × 1 : 1920 × 1080, BNC × 1 : CVBS (used as the main or spot output)
Audio	Input	RCA × 4
	Output	RCA × 1
	Two-way audio	Take up channel one audio input
Record	Resolution	1080P, 1080P lite, 720P, WD1
	Frame Rate	1080P : 100 fps (PAL) 120 fps (NTSC) 1080P Lite / 720P / WD1: 200 fps (PAL) 240 fps (NTSC)
	Bit Rate	768Kbps ~ 8Mbps
	Mode	Manual, timer, motion, sensor
	Resolution	3MP / 1080P / 960P / 720P
IP Input	Frame Rate	3MP 12fps (PAL) 15fps (NTSC)
		1080P 25fps (PAL) 960P 30fps (NTSC)
		720P
Play back	Playback	8 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception
	Input	4
	Output	1
Network	Triggering	Record, snap, preset, e-mail, etc.
	Interface	RJ45 10M / 100Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Mobile Device	OS	iOS, Andriod
Storage	HDD	SATA × 1, max 6T
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	RS485	RS485 × 1, connect to PTZ or keyboard
	USB	USB 2.0 × 2 (one in the front panel and the other in the rear panel)
	Remote Controller	Optional
Others	Power Supply	DC 12V
	Consumption	≤ 8W (without HDD)
	Dimensions (mm)	12 × 11 × 2.2 (W × D × H)
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity