



VEILUX®

DAY & NIGHT IR BULLET CAMERA

SVB-42IR24




SPECIFICATIONS

ITEM	SVB-42IR24	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	270,000	320,000
Sync. System	Internal	
Scanning System	525 Lines, 60 Fields/Sec	625 Lines, 50 Fields/Sec
Min. illumination	0.01Lux 5600 K F2.0 / 0.000Lux (IR LED ON)	
Lens	4mm IR LENS, 6mm Option	
Resolution	420 TV Lines	
S/N Ratio	More than 48db (AGC OFF)	
White Balance	AWB	
WB Range	AWB (3200~10000K)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Video Output	1.0 Vp-p composite video at 75ohm	
IR LED	24 Units 850nm (20,000 Hours)	
Gamma Correction	$\gamma=0.45$	
Beam Spread	56° 6mm Lens / 36° 4mm Lens	
Night View Distance	Indoor 25m / Outdoor 15m	
Gain Control	AGC	
Operational Temp'	-20°C ~ 50°C	
Water Resistance	IP55 / NEMA4	
Power Supply	12VDC 450mA	
Operational Hum'	Within 90% RH	
Dimensions	55(W) mm x 81(L) mm Without Sunshield	
Weight		

FEATURES

- 1/3" SONY Super HAD CCD
- 420 TV Lines
- Day & Night Function
- Back Light Compensation
- High Resolution: Vivid Sharp Picture
- Indoor 25m, Outdoor 15m
- 24 Units Infrared LED
- 4mm IR Lens (6mm Option)
- Rainproof (IP-55)
- Dampproof
- 12VDC 450mA

DIMENSION

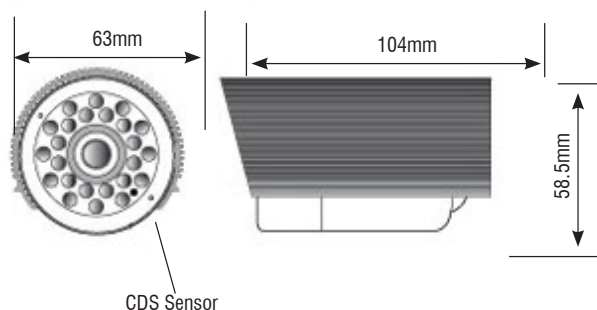

VEILUX®
The Art of Surveillance