



VEILUX®

DUAL POWER DAY & NIGHT IR BULLET CAMERA

SVB-42IR66L49D



SPECIFICATIONS

ITEM	SVB-42IR66L49D	
TV System	NTSC	PAL
Image Sensor	1/3" SONY SuperHAD CCD	
CCD Total Pixel	270,000	320,000
Sync. System	Internal	
Scanning System	525 Lines, 60 Fields/Sec	625 Lines, 50 Fields/Sec
Min. illumination	0.1Lux 5600 K F2.0 / 0.000Lux (IR LED On)	
Lens	4~9mm DC Auto Iris	
Resolution	420TV Lines	
S/N Ratio	48dB Min. (AGC off)	
White Balance	ATW	
WB Range	AWB, ATW (2500~10000K)	
Electrical Shutter	1/60~1/100,000sec	1/50~1/100,000sec
IR LED	66 Unit Infrared LED, 20,000hrs 850nm (Option 920nm)	
Gamma Correction	$\gamma=0.45$	
Beam Spread	36+56"	
Night View Distance	Indoor: 40m / Outdoor: 20m	
Gain Control	AGC	
Operation Temp'	-20°C~50°C	
Water Resistance	IP-55 / NEMA4	
Operational Hum'	Within 90% RH	
Power Supply	12VDC / 24VAC	
Dimension	92(ø) x 98mm(L) (Without Sunshield)	
Cable	500mm BNC, DC Jack	



0.000
LUX



VOLTAGE 12DC
24AC



420
TV LINES



D&N
NIGHT DAY




IR LED

FEATURES

- 1/3" SONY SuperHAD CCD
- High Resolution Over 420TV Lines
- Day & Night Function
- BLC (Back Light Compensation)
- High Resolution: Vivid Sharp Picture
- Indoor: 40m / Outdoor: 20m
- 66 Units Infrared LED
- 4-9mm DC Auto Iris IR Lens
- Rainproof (IP-55)
- Dampproof
- Dual Power 12VDC/24VAC

DIMENSIONS

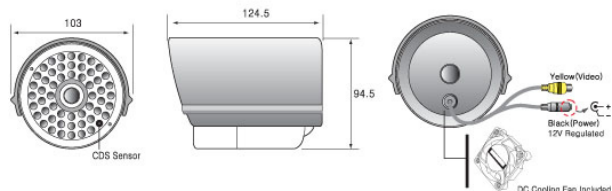

VEILUX®
The Art of Surveillance