



VEILUX®

BULLET CAMERA

SVB-48



SPECIFICATIONS

ITEM	SVB-48	
TV System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	410,000	470,000
Scanning System	525Lines, 60fields./sec	625Lines, 50fields./sec
Scanning Freq' (H)	15.734 KHz	15.625 KHz
Scanning Freq' (V)	59.94 Hz	50 Hz
Min. Illumination	(0.01 Lux) F2.0	
Back Light Comp.	Auto	
LENS Mount	3.6mm Board Lens	
Resolution	480 TV Lines (Color)	
S/N Ratio	More than 48db (AGC OFF)	
White Balance	Auto	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Gamma Correction	$\gamma=0.45$	
Gain Control	(AUTO)	
Weatherproof	(Rainproof)	
Operation Temp'	-10°C ~ -50°C	
Dimensions	41mm(ø) X 100mm(L) with sun shield	
Power Supply	12VDC	

WEATHER-PROOF



0.01 LUX



AGC Auto Gain Control
OFF **ON**




VOLTAGE 12DC



AWB Auto White Balance



480 TV LINES



FLICKERLESS




BLC Back Light Compensation
OFF **ON**



FEATURES

- 480 TV Lines
- 1/3" SONY Super HAD CCD
- 3.6mm Board Lens
- Min. Illumination: 0.01 Lux F2.0
- Stabilized images by reducing flickering
- Back Light Compensation / Weatherproof
- 41mm In Diameter
- 12VDC

DIMENSION

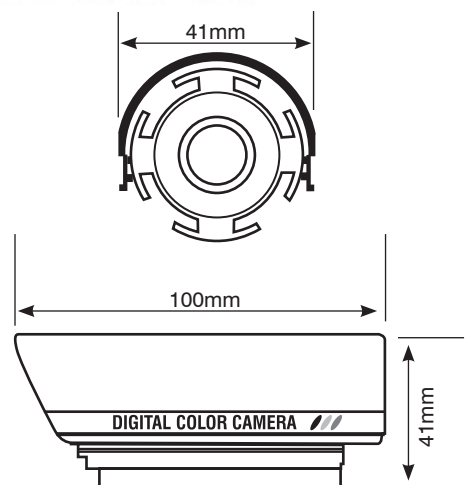

VEILUX®
The Art of Surveillance

3015 Eagle Drive, Suite 100, Grand Prairie, Texas 75052
Local Number: (214) 635-4855 / Fax: (928) 437-6270
sales@veilux.net
www.veilux.net