



# SURVEILUX®

## WEATHER PROOF DAY & NIGHT IR BULLET CAMERA

### SVB-54IRC90L550



### SPECIFICATIONS


| ITEM                | SVB-54IRC90L550                                      |                        |
|---------------------|------------------------------------------------------|------------------------|
| Signal System       | NTSC                                                 | PAL                    |
| Image Sensor        | 1/3" SONY Super HAD CCD                              |                        |
| CCD Total Pixel     | 811(H) X 508(V) 410K                                 | 795(H) X 596(V) 470K   |
| Sync. System        | Internal                                             |                        |
| Scanning System     | 525Lines, 60fields/sec                               | 625Lines, 50fields/sec |
| Min. Illumination   | 0.1Lux 5600 K F2.0 / 0.000Lux (IR LED ON)            |                        |
| Lens                | 5~50mm DC Auto Iris IR Varifocal                     |                        |
| Resolution          | 540 TV Lines (Color), 600 TV Lines (B&W)             |                        |
| S/N Ratio           | More than 48db (AGC OFF)                             |                        |
| White Balance       | ATW                                                  |                        |
| WB Range            | ATW (2500~10000K)                                    |                        |
| Electronic Shutter  | 1/60~1/100,000 sec.                                  | 1/50~1/100,000 sec     |
| IR LED              | 90 Units Infrared LED, 20,000hrs 850nm(Option 920nm) |                        |
| Gamma Correction    | $\gamma=0.45$                                        |                        |
| Beam Spread         | 36+56                                                |                        |
| Night View Distance | Indoor 90m / Outdoor 70m                             |                        |
| Gain Control        | AGC                                                  |                        |
| Operational Temp.   | -20°C~50°C                                           |                        |
| Water Resistance    | IP55 / NEMA4                                         |                        |
| Op' Humidity        | Within 90% RH                                        |                        |
| Dimensions          | 131(W) x 124(H) X 185(L) mm                          |                        |
| Power Supply        | 12VDC / 1690mA (Max)                                 |                        |
| Cable               | 1m BNC, DC Jack (Waterproof Option)                  |                        |
| Waterproof Cable    | 20m / 30m / 40m                                      |                        |
| Weight              |                                                      |                        |



### FEATURES

- 1/3" SONY SuperHAD CCD
- Over 540TV Lines
- True Day & Night (ICR-IR Cut Filter Removable)
- Mirror Function(Optional)
- Dwell Time Setting(Default 20sec.)
- External Focus & Distance Control Rings
- Back Light Compensation
- High Resolution: Vivid Sharp Picture
- Indoor : 90m / Outdoor : 70m
- 90 Units Infrared LED
- 5~50mm DC Auto Iris IR Lens
- Cooling Fan is included
- Dampproof, Rainproof (IP-65)
- 12VDC / 1550mA (Max)

### DIMENSION

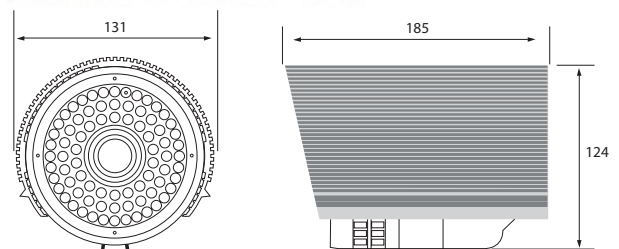

# SURVEILUX®

The Art of Surveillance