



VEILUX®

DUAL POWER WEATHER PROOF DAY & NIGHT IR BULLET CAMERA

SVB-54IRC90L550D



SPECIFICATIONS

ITEM	SVB-54IRC90L550D	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	811(H) X 508(V) 410K	795(H) X 596(V) 470K
Sync. System	Internal	
Scanning System	525Lines, 60fields/sec	625Lines, 50fields/sec
Min. Illumination	0.1Lux 5600 K F2.0 / 0.000Lux (IR LED ON)	
Lens	5~50mm DC Auto Iris IR Varifocal	
Resolution	540 TV Lines (Color), 600 TV Lines (B&W)	
S/N Ratio	More than 48db (AGC OFF)	
White Balance	ATW	
WB Range	ATW (2500~10000K)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
IR LED	90 Units Infrared LED, 20,000hrs 850nm(Option 920nm)	
Gamma Correction	$\gamma=0.45$	
Beam Spread	36+56	
Night View Distance	Indoor 90m / Outdoor 70m	
Gain Control	AGC	
Operational Temp.	-20°C~50°C	
Water Resistance	IP55 / NEMA4	
Op' Humidity	Within 90% RH	
Dimensions	131(W) x 124(H) X 185(L) mm	
Power Supply	12VDC / 24VAC	
Cable	1m BNC, DC Jack (Waterproof Option)	
Waterproof Cable	20m / 30m / 40m	



0.000
LUX



VOLTAGE 12DC
24AC



540
TV LINES



RAIN-PROOF
DAMP-PROOF
IP65




LENS Vari-focal



FEATURES

- 1/3" SONY SuperHAD CCD
- Over 540TV Lines
- True Day & Night (ICR-IR Cut Filter Removable)
- Mirror Function(Optional)
- Dwell Time Setting(Default 20sec.)
- External Focus & Distance Control Rings
- Back Light Compensation
- High Resolution: Vivid Sharp Picture
- Indoor : 90m / Outdoor : 70m
- 90 Units Infrared LED
- 5~50mm DC Auto Iris IR Lens
- Cooling Fan is included
- Dampproof, Rainproof (IP-65)
- 12VDC / 24VAC

DIMENSION

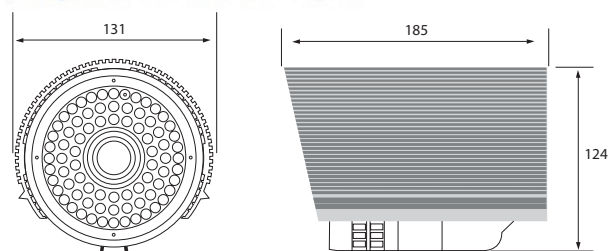

VEILUX®
The Art of Surveillance