



VEILUX®

DUAL POWER TRUE DAY & NIGHT IR BULLET CAMERA SUPER DNR CAMERA

SVB-56IRC80L650D



SPECIFICATIONS


ITEM	SVB-56IRC80L650D	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Resolution	560 TV Lines	
Synchronization	Internal	
Frequency	15.734 KHz(H) 59.94 Hz(V)	15.625 KHz (H) 50.00 Hz(V)
Video Output	1.0 Vp-p Composite Video at 75 ohm	
Burst Level	0.286 Vp-p	
S/N Ratio	More than 50db (y, Aperture, AGC OFF)	
Min. illumination	0.00001Lux (F1.2 20IRE, Sense-up X32)	
Sense Up	Max. 32 Times, 0.00001 Lux	
Gamma Correction	$\gamma=0.45$	
AGC	+18dB Max.	
IRIS Control	Electrical IRIS / Lens IRIS (DC Lens)	
Electronic Shutter	1/60~1/120,000 sec.	1/50~1/120,000 sec
O.S.D	Lens, Brightness, Backlight, Shutter, AGC, Sense Up, White Balance, Day / Night, Motion, Privacy, Title, Nega / Posi, Sharpness, Mirror, Zoom, Pan / Tilt	
Lens	6~50mm DC Auto Iris Lens	
IR LED (Main)	40 Units 850nm Infrared LED, 20,000 Hrs / 36° + 56°	
SRLED (Single Reflection LED)	20+20 Units 850nm Infrared LED, 20,000 Hrs / + -9°	
Night View Distance	Outdoor 120m	
Oper. Temp/Hum	-10°C ~ 50°C / 30%~80%	
Stor. Temp/Hum	-20°C ~ 60°C / 20%~90%	
Power Supply	12VDC / 24VAC	
Dimensions	90(V) x 93(H) x 235(L)mm	



FEATURES

- 1/3" SONY Super HAD CCD
- High Resolution Over 560 TV Lines
- True Day & Night (ICR-IR Cut Filter Removable)
- IR LEDs (Main) 40 Units Infrared LEDs 20,000 Hrs 850nm
- SRLED (Single Reflection LED) 20+20 Units SRLED 20,000 Hrs 850nm
- Night View Distance: Outdoor 120m
- External Control: Tele/Wide, Near/Far, OSD, Service Video
- Privacy Function
- Electronic IRIS
- DNR (Digital Noise Reduction)
- Controlled By OSD Menu
- Built-in Concealed Cable Bracket

DIMENSION

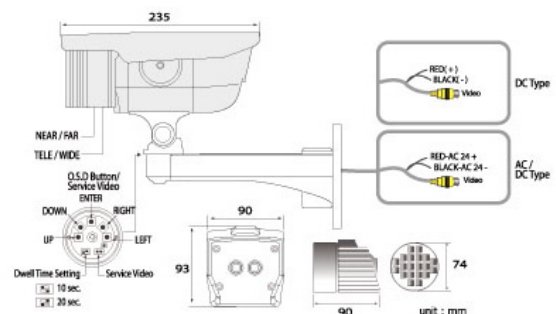

VEILUX®

The Art of Surveillance