



VEILUX®

DUAL POWER WEATHER PROOF DAY & NIGHT IR BULLET CAMERA

SVB-58IRC28L3516D



SPECIFICATIONS

ITEM	SVB-58IRC28L3516D	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	811(H) X 508(V) 410K	795(H) X 596(V) 470K
Sync. System	Internal	
Scanning System	525Lines, 60fields/sec	625Lines, 50fields/sec
Min. Illumination	0.1Lux 5600 K F2.0 / 0.000Lux (IR LED ON)	
Lens	3.5~16mm DC Auto Iris	
Resolution	580 TV Lines (Color)	
S/N Ratio	More than 48dB (AGC OFF)	
White Balance	ATW	
WB Range	ATW (2500~10000K)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Video Output	1.0 Vp-p Composite video at 75ohm	
IR LED	28 Units Infrared LED, 20,000hrs 850nm(Optional)	
Gamma Correction	$\gamma=0.45$	
Beam Spread	36+56	
Night View Distance	Indoor 35m / Outdoor 25m	
Gain Control	AGC	
Operation Temp.	-20°C~50°C	
Water Resistance	IP65	
Op' Humidity	Within 90% RH	
Dimensions	74.5Ømm x 123(L) mm (Without SunShield)	
Power Supply	12VDC / 24VAC	
Cable	BNC, DC Jack	

AGC Auto Gain Control
OFF **ON**

AWB Auto White Balance

BLC Back Light Compensation
OFF **ON**

DC IRIS

D&N NIGHT DAY

MIRROR FUNCTION **BB**

0.00 LUX

VOLTAGE 12DC 24AC

580 TV LINES


RAIN-PROOF DAMP-PROOF **IP65**

FLICKERLESS

FEATURES

- 1/3" SONY Super HAD CCD
- 580 TV Lines
- Day & Night (ICR-IR Cut Filter Removeable)
- Mirror Function
- 3.5~16mm DC Auto Iris IR Lens
- Dwell Time Setting (Default 20sec.)
- External Control Rings for easy Focus & Distance Adjustment
- External DC Auto Iris Lens Level Control
- External Flickerless On/Off (Option)
- BLC (Back Light Compensation)
- High Resolution: Vivid Sharp Picture
- Indoor: 35m/Outdoor: 25m
- 28 Units Infrared LED
- Rainproof (IP-65)
- Dampproof
- Power 12VDC / 24VAC

DIMENSION

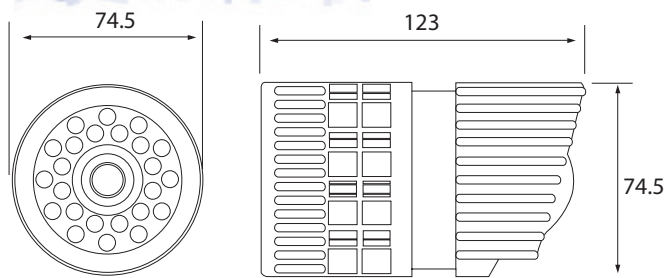

VEILUX®
The Art of Surveillance