




SURVEILUX®

AIRPROOF CAMERA HOUSING

SVEX-6004A/C

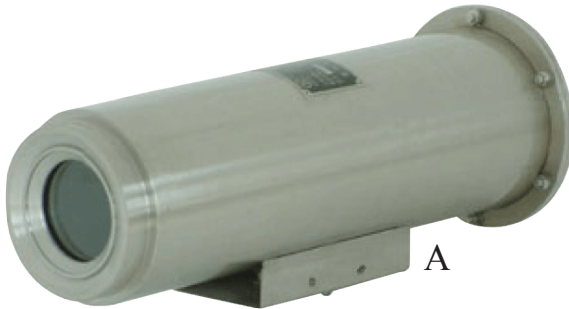

A




C

SVEX-6004 is a classical and matured monitoring product has been used stably for many years. Inside could be a fixed camera, zoom camera or integrated camera.


Stainless steel structure to satisfy all kinds of environment, working under -40°C to $+60^{\circ}\text{C}$ for longtime stably. Power by 24VAC or 220VAC.

Sunshield could efficiently reduce the temperature of equipment, wiper to ensure a clear window. Window adopts good steel glass to ensure a good picture quality. With two or three cable outlets, uses steel tube to protect cable and with low temperature auto-healing optional.

DIMENSION

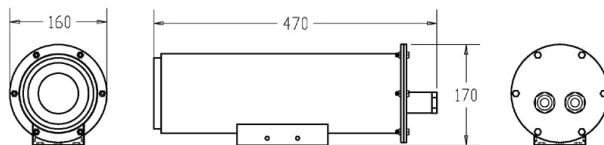

Camera A

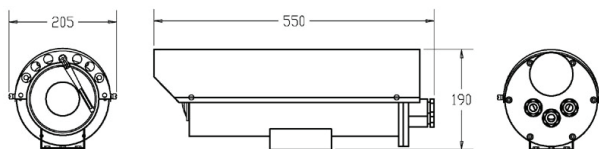

Camera C

FEATURES

- Stainless Steel Material
- A For Zoom Lens Camera
- C For Camera w/ Wiper & Sunshield
- Optional Auto-Healing
- Applied in Great Change Atmospheres
- Tough Steel Glass For Window
- Housing Back w/ 2 or 3 Outlets
- Indoor & Outdoor Installation For All Weather Use
- IP68



SURVEILUX®

The Art of Surveillance



SURVEILUX®

AIRPROOF CAMERA HOUSING

SVEX-6004A/C

ELECTRICAL

ITEM	SVEX-6004A	SVEX-6004C
Power Supply	220VAC/24VAC, 50/60Hz	
Voltage Scope	± 10%	
Working Current	≤0.5A	
Heater (Optional)	To Setup While It Is -10°C ± 5°C	
Wiper	220VAC/50Hz or 24VAC/50Hz	
Power Consumption	30W w/ Heater	
Electric Connection	2-Core For Power 4-Core For Lens 4-Core For Wiper 1 Video Cable	

ENVIRONMENTAL

ITEM	SVEX-6004A	SVEX-6004C
Air Pressure	86~106KPa	
Temperature	-40°C~+60°C	
Humidity	≤95%RH (+25°C)	

MECHANICAL

ITEM	SVEX-6004A	SVEX-6004C
Material	Stainless Steel	
IP	IP68	
Inner Size	260mm(L) X 80mm(H) X 60mm(W)	260mm(L) X 75mm(H) X 60mm(W)
Viewing Window	8mm Thick	
View Window Area	66mm	
Wind Mouth Size	3/8" Screw	
Wind Pressure	0.1~0.3Mpa	
Weight	6Kg / 8Kg	9Kg / 11Kg
Cable Outlet Qty	2	3
Outlet Type	G-3/4"	
Installation	Pan/Tilt, Half-Fixed Pan/Tilt, Fixed Bracket	