



VEILUX®

CONTROLLER (3-AXIS JOYSTICK KEYBOARD)

SVK-64



AGC Auto Gain Control
OFF **ON**

0.00
LUX

AWB Auto White Balance

VOLTAGE **12DC**

LENS Fixed

380
TV LINES

IR LED
ON **OFF**

MIRROR
FUNCTION **BB**


SPECIFICATIONS

ITEM	SVK-64
Control	Pan / Tilt, Zoom, Power, Auto Pan, AUX Control x 2, Preset
Connecting Unit	CCTV Receiver (DRX-502/500), PTZ Dome Cameras
Communication Method	RS-485 (422)
Communication Speed	RS-485 - 9600bps, N, 8, 1
Connector	Modular Cable Connection with Junction Box Power Supplied Via Junction Box
Package	Junction Box, 5M Cable (Modular Jacks Both Ends)
Operating Distance	Max 1.2Km (When Using Shielded Twisted Pair Cable)
Power	12W
Operating Condition	0°C ~ +40°C
Weight	Approx. 3.5Kg
Dimensions	337.5(W) x 50(H) x 153(D)mm

FEATURES

- Controller For The Remote Control of CCTV Devices: Power, Pan / Tilt / Zoom Lens, AUX
- Controls Up To Maximum 255 CCTV Receivers
- Preset Control: 64 Positions Memory Set For Each Camera
- Built-In Requitil Ability For Electricity Failure: Power, Auto, Pan, Preset Position
- Built-In Back Light For LCD Window
- 3-Axis Joystick Control To Pan / Tilt / Zoom Movement
- Can Be Connected With Up to 8 Sub-Keyboards

DIMENSION

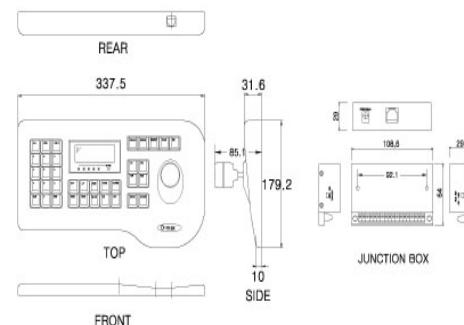

VEILUX®

The Art of Surveillance