



SURVEILUX®

COLOR DOME CAMERA

SVMD-42



MIRROR
FUNCTION



0.01
LUX



BLC Back Light
Compensation
OFF ON



VOLTAGE 12DC



3-AXIS



420
TV LINES




SPECIFICATIONS

ITEM	SVMD-42	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	270,000	320,000
Sync. System	Internal	
Scanning System	525 Lines, 60 Fields/sec	625 Lines, 50 Fields/sec
Min. Illumination	0.01Lux F2.0	
Lens Mount	3.6mm Lens (Option 2.45mm)	
Resolution	420 TV Lines (Color)	
S/N Ratio	More than 48db (AGC OFF)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Gamma Correction	$\gamma=0.45$	
Operational Temp'	-10°C ~ 50°C	
Operational Humidity	Within 90% RH	
Dimensions	78.5(Ø) x 50(H) mm	
Power Supply	12VDC / 90mA (Max)	
Weight	Approximately 147g	

FEATURES

- 1/3" SONY Super HAD CCD
- 420 TV Lines
- Mirror Function
- 3-Axis Gimbals
- Poly Carbonate Clear Cover
- Back Light Compensation
- Vivid Sharp Picture
- High Sensitivity, Low Smear, High Anti-Blooming

DIMENSION

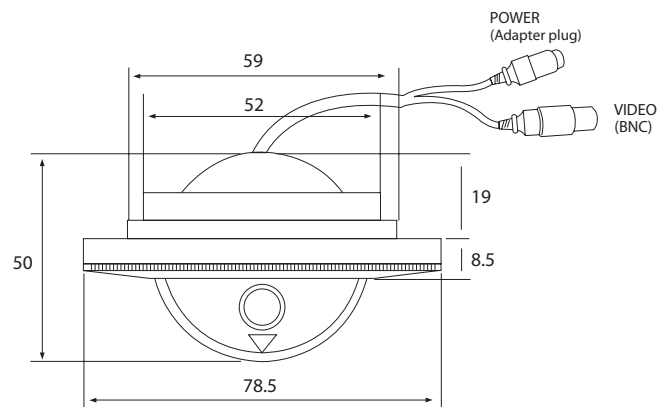

SURVEILUX®
The Art of Surveillance