



VEILUX®

DUAL POWER W.D.R STANDARD CAMERA

SVS-54WDNRD




SPECIFICATIONS

ITEM	SVS-54WDNRD	
Signal System	NTSC	PAL
Image Sensor	Pixim 1/3" DPS ORCA Chip Sensor	
Effective Pixels	720(H) x 540(V)	
Horizontal Res.	540TV Lines	
Scanning System	2:1 Interlace	
Synchronization	Internal	
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz	
Min. Illumination	Color: 0.4 Lux (F1.2), (Sense-Up 32x: 0.08 Lux)	
Day & Night	Day & Night Function By Digital Change: Auto/Off/On	
White Balance	Auto / ATW / DESAT / AWC / Manual	
DSS	Off / 2 Fields ~ 32 Fields / Custom	
DNR	On / Off	
Flip	Off / H.Flip / V.Flip / H.H Flip	
AGC	Low / Middle / High	
Camera ID	On / Off	
Wide Dynamic Range	Max 120dB / 17 Bit	
Privacy Zones	Off / On (White, Black, Red)	
S/N	More Than 50dB	
Video Output	1.0 Vp-p Composite video at 75ohm	
O.S.D	Built-in	
Lens	C/CS Mount	
Operating Temperature/Humid	-10°C~50°C / 30%~80%	
Storage Temperature/Humid	-20°C~60°C / 20%~90%	
Power	12VDC - 180mA / 24VAC - 90mA	
Dimension	61(V) x 55(H) x 106(L)mm	
Weight	Abt. 400g	

FEATURES

- Pixim 1/3" DPS ORCA Chip Sensor
- High Resolution (Up to 540 HTVL)
- Best WDR (Wide Dynamic Range)
- EDNR (Electronic Digital Noise Reduction)
- Digital Day & Night, 6 Privacy Masking Zones
- Place Setup For Easier Setting (Indoor, Outdoor, Normal, Custom, Fluorescent)
- Built-in OSD (On Screen Display) Menu
- Selectable Language (English, German, French)
- Power (12VDC - 180mA / 24VAC - 90mA)

DIMENSION

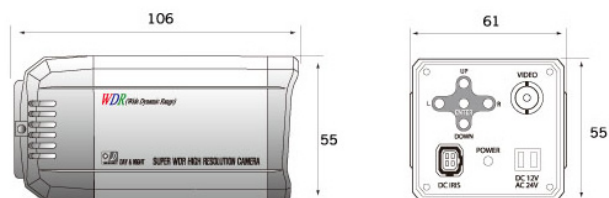

VEILUX®

The Art of Surveillance