



VEILUX®

PASSIVE CCTV RECEIVER HUB

SVU-PR8



SPECIFICATIONS


ITEM	SVU-PR8
Bandwidth	Video: DC to 6 MHz.
Attenuation	Max 1.5dB
Common mode / Diff. Rejection	15KHz - 5MHz Typical 60dB
Resistance BNC	75ohm
Connector UTP	100ohm
Power Supply	12VDC 40mA
Cable Type:	
Specification	24AWG or Thicker Cat-3 above
Resistance	100ohm
DC Loop Resistance	18ohm / 100m
Diff. Capacitor	62 pf/m
Environment:	
Operating Temp'	-25°C to 70° C.
Humidity	0~95%
Anti-transient Ability	6000V
Weight	1.108kg
Dimensions	L 450mm (17.7") W 117mm (8.66") H 45mm (1.77")

The VEILUX SVU-P8 is an 8 port video receiver hub with built-in surge suppression. Systems operate with passive video transmitter. The SVU-PR8 video receiver hubs are multi-channel video transmission devices that provide a low cost means of sending quality live video over Category UTP cabling. The systems can also adapt to existing communication and computer network spare pairs, or new cable installations. The SVU-PR8 can receive video up to 743 feet (225 meters) when used with other products in the SVU-PT01 or SVU-PT passive video transmitter family. The SVU-P8 is designed to provide superior immunity from noise and interference, such as RFI and EMI.

FEATURES

- PAL, NTSC, SECOM All-systems compatible
- Eliminates coaxial cable;
- Up to 225 meters (743 feet) via Category 5 unshielded cable
- Open on spot and easy adjustment
- Convenient installation

DIMENSION

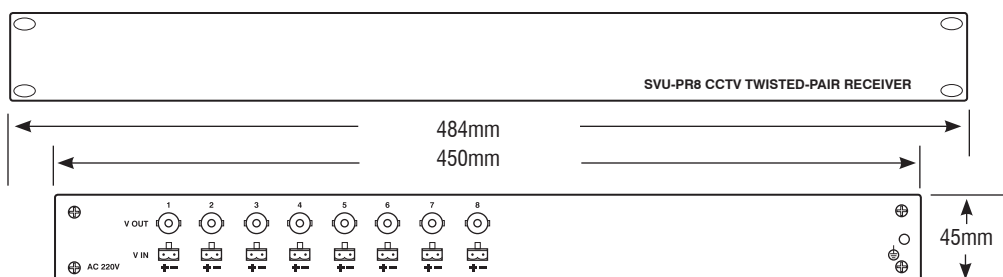

VEILUX®

The Art of Surveillance