



SURVEILUX®

DUAL POWER WDR VANDAL PROOF DOME CAMERA

SVV-54WDNL210D



SPECIFICATIONS


ITEM	SVV-54WDNL210D	
TV System	NTSC	PAL
Image Sensor	Pixim 1/3" DPS ORCA Chip Sensor	
Effective Pixel	720(H) x 540(V)	
Scanning System	540TV Lines	
Sync. System	Internal	
Frequency	Horizontal: 15.734KHz, Vertical: 59.94Hz	
Min. illumination	Color: 0.4Lux (F1.2), (Sense-Up 32X: 0.08Lux)	
Day & Night	Day & Night Function By Digital Change: Auto / On / Off	
White Balance	Auto / ATW / DESAT / AWC / Manual	
DSS	Off / 2 Fields~32 Fields / Custom	
DNR	On / Off	
Flip	Off / H.FLIP / V.FLIP / H-H.FLIP	
AGC	Low / Middle / High	
Camera ID	On / Off	
Wide Dynamic Range	Max 120dB / 17 Bit	
Privacy Zones	On / Off (White, Black, Red)	
S/N Ratio	More Than 50dB	
Video Output	Composite Video Output 74ohm Terminated	
O.S.D	Built-In	
Lens	Aspherical 2.8~10mm (F1.2) DC Auto Iris Lens	
Operation Temp'	-10°C~50°C	
Operational Hum'	30%~80%	
Storage Temp'	-20°C~60°C	
Storage Hum'	20%~90%	
Power Supply	12VDC / 24VAC	
Dimension	143mm(ø) x 100mm(H)	
Cable	BNC, DC Jack	



FEATURES

- Pixim 1/3" DPS ORCA Chip Sensor
- High Resolution (Up To 420 HTVL)
- Best WDR (Wide Dynamic Range)
- Digital Day & Night, 6 Privacy Masking Zones
- Place Setup For Easier Setting (Indoor, Outdoor, Normal, Custom, Fluorescent)
- Built-In OSD (On Screen Display) Menu
- Selectable Language (English, German, French)
- Lens-Aspherical 2.8~10mm (F1.2) DC Lens
- Power (12VDC / 24VAC)
- 3-Axis Gimbals

DIMENSIONS

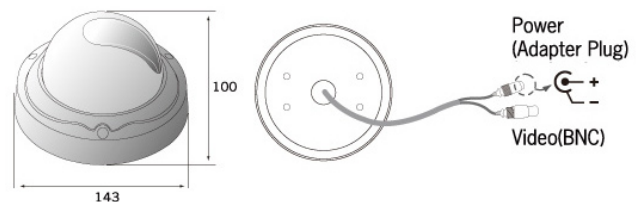

SURVEILUX®

The Art of Surveillance