



VEILUX®

DUAL POWER TRUE DAY & NIGHT VANDAL RESISTANT DOME CAMERA

SVV-58CDNL2812D



0.005 LUX



VOLTAGE 12DC / 24AC



580 TV LINES



RAIN-PROOF IP65



AWB Auto White Balance


SPECIFICATIONS

ITEM	SVV-58CDNL2812D	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	410,000	470,000
Scanning System	525Lines, 60fields/sec	625Lines, 50fields/sec
Min. Illumination	0.005 Lux F2.0	
Lens	2.8~12mm DC Auto Iris	
Resolution	580TV Lines	
S/N Ratio	48db Min. (AGC OFF)	
White Balance	ATW	
WB Range	AWB, ATW (3200~10000K)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Video Output	1.0 Vp-p Composite Video at 75ohm	
Gamma Correction	$\gamma=0.45$	
Gain Control	AGC	
Operational Temp.	-20°C~50°C	
Water Resistance	IP-65	
Op' Humidity	Within 90% RH	
Dimensions	143 x 100mm(L)	
Power Supply	12VDC - 220mA (Max) / 24VAC - 110mA (Max)	

FEATURES

- 1/3" SONY SuperHAD CCD
- High Resolution Over 580TV Lines (SONY HQ-1 DSP)
- True Day & Night (ICR-IR Cut Filter Removable)
- Mirror Function
- 3-Axis Gimbals
- Dwell Time Setting(Default 20sec.)
- Back Light Compensation
- High Resolution: Vivid Sharp Picture
- 2.8~12mm DC Auto Iris IR Lens
- Rainproof (IP-65)
- Dual Power (12VDC / 24VAC)

DIMENSION

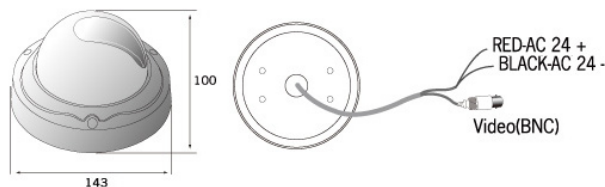

VEILUX®

The Art of Surveillance