

Product Specifications

TPSC-68CDNR-90

Features:

- 1/3" Hyper Wide Dynamic Car License Plate Camera (Effio WDR)
- Color 680 TV Lines
- Color 0.03Lux @ F1.0, B/W 0.01 Lux @ F1.0, Sense-up 0.0001 Lux @ F1.0
- Powerful 510x WDR (54dB)
- Capable of Capturing Car License Plate Numbers at High Speed
Day: up to 200km/hr (125mph) Night: up to 150km/hr (90mph) with IR LEDs
- Shutter Modes (Auto, Manual)
- Multi-Language OSD Control
- Fog Reduction
- High Light Compensation (HLC)
- 2D/3D Noise Reduction; Sense up (512x)
- Digital Image Stabilizer (DIS); E-zoom Functions (1~256x)
- Advanced Motion Detection Function
- Quadrangle Mosaic Privacy Mask







Synchronizing System	NTSC PAL
Image Sensor	1/3" Sony 960H EXview HAD CCD II
Horizontal Res.	Color: 680 TVL, B/W: 700TVL, Sony Effio WDR
Minimum Illumination	Color: 0.03Lux@F1.2, B/W: 0.01Lux@F1.2, 0.005Lux@F1.2 (with ICR), Sense-up: 0.0001Lux@F1.2
Wide Dynamic Range	510x Normal Camera (54dB)
Video Output	1.0Vp-p Composite, 75Ω (BNCx2)
Signal to Noise Ratio	More than 55dB (AGC off)
Gamma Correction	0.45
Mechanical IR Cut Filter	N/A
IR LED	N/A
Menu	OSD Control or by RS485 Control
Title	TITLE (Location)
Synchronizing System	Internal / Line Lock (AC Version Only)
Digital Day-Night Mode	Color / B&W / Auto / Ext
Auto Gain Control	0~200 Levels (Adjustable Level Settings)
White Balance	ATW / AWB / PUSH LOCK / MANUAL / 3200K / 6300K / ANTI CR
WDR; BLC; Fog Reduction	WDR / Fog Reduction / BLC / OFF

Product Specifications

TPSC-68CDNR-90

High Light Compensation	ON / OFF / AUTO
Flickerless	ON / OFF
Dynamic Noise Reduction	3D / 2D
Sense Up	AUTO (Limit x2~x512) / OFF
Language	English / Traditional Chinese / Simplified Chinese
Motion Detection	ON / OFF(24x16 Zones, Alarm); ON / OFF (15 Zones
Camera Control Int.	RS485 Interface OSD Control by Pelco-D, Pelco-P
Lens Mount	CS / C mount (With Adaptor Ring)
Water Resistance	NA
Power Supply	12Vdc/24Vac(10.8~39Vdc/24Vac) 2W
Operation Storage Temp.	-10°C~50°C, -20°C~60°C
Operation Storage Hum.	Maximum: RH 80%, RH 90%
Dimensions	67(W)x56(H)x120(L)mm
Weight	350g

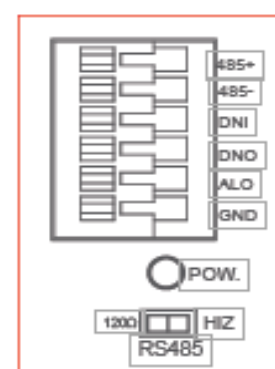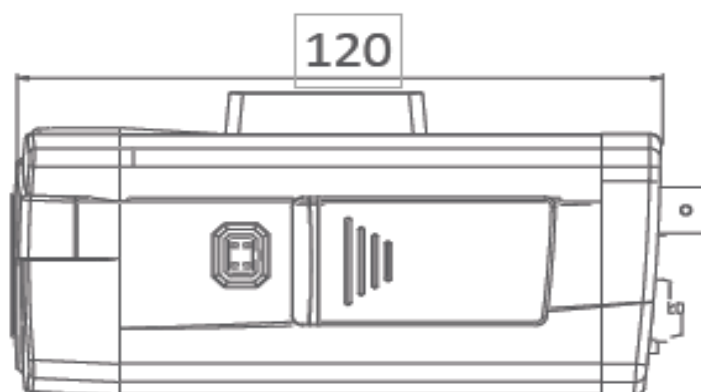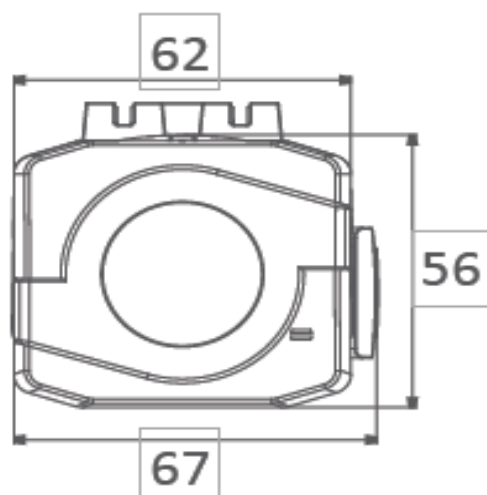

Tol:±0.5 Unit:mm