


TVIOB-PR2EXIRZ

2MP Prime HD-TVI True WDR EXIR Motorized Vari-focal Bullet Camera

- 2.8-12mm Motorized Varifocal Lens
- Dual voltage 12V DC / 24V AC
- Up to 131 feet IR with EXIR
- True WDR, up to 120dB



Megapixels:	2MP
Max Resolution:	1080p
Image Resolutions:	2MP (1928 x 1088)
Image Sensor:	2MP CMOS Image Sensor
Min Illumination:	0.01 Lux @ (F1.2,AGC ON), 0 Lux with IR
LEDs:	2
IR Distance:	131 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F, 10% ~ 90% relative humidity
Dimension:	3.62in x 3.34in x 3.34in
Power:	12V DC / 24V AC±15%

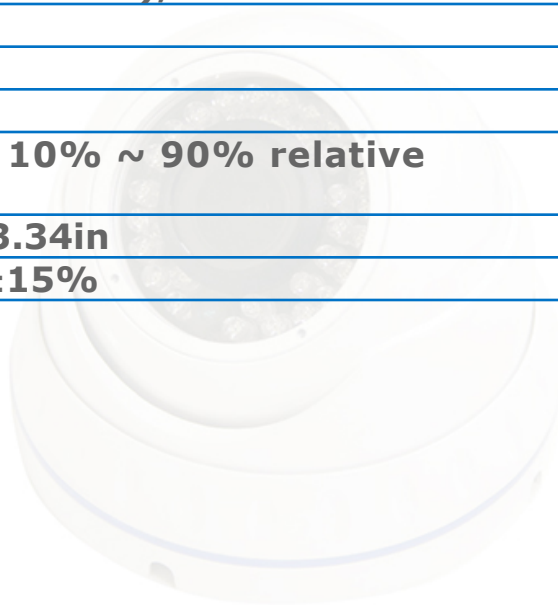

TVIOB-PR2EXIRZ

2MP Motorized Varifocal EXIR Bullet Camera


Specifications

Camera	
Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1928(H)*1088(V)
Min. illumination	0.01 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	Motorized VF lens; 2.8 - 12 mm
	Angle of view: 35.1°-114.5°
Lens Mount	φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° - 360°; Tilt:0° - 90°; Rotate: 0° - 360°
Synchronization	Internal Synchronization
WDR	120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	>62dB
Menu	
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/ MWB
BLC	Support
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR
General	
Operating Conditions	-40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%; -A: 12 VDC/24VAC±15%
Power Consumption	Max. 6W; -A: Max. 9W
Protection Level	IP66
IR Range	Up to 40m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	92mm×84.8mm×269.6mm (3.62"×3.34"×3.34")
Weight	Approx. 900g (1.98lb)

TVIOB-PR2EXIRZ

2MP Motorized Varifocal EXIR Bullet Camera

Dimensions

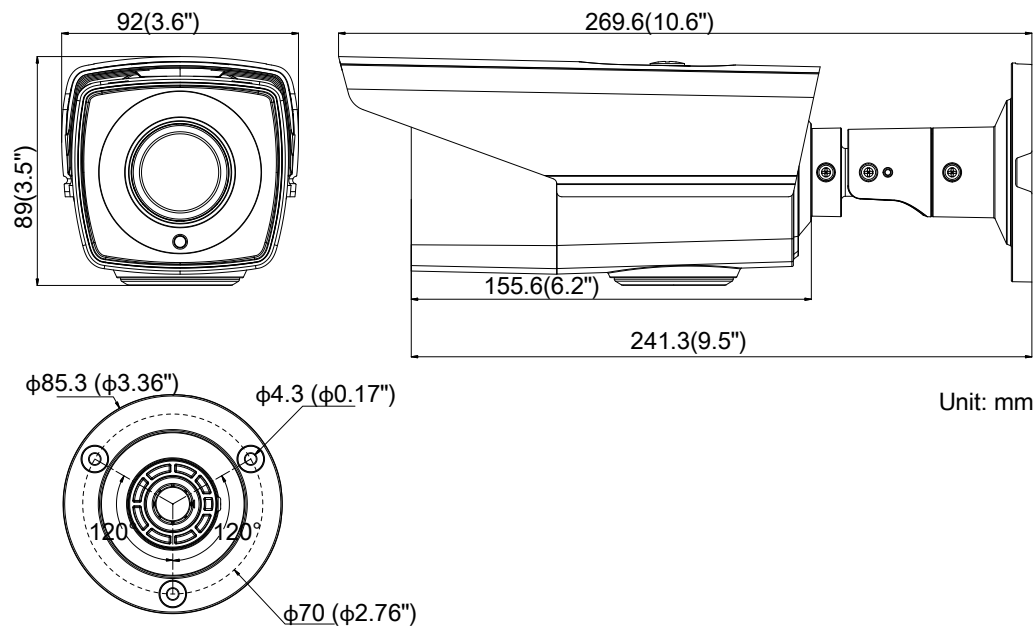

Accessories



PM-PR1275ZJ

Vertical Pole Mounting



JB-PR1280ZJ-S

Junction Box