

TVIOB-PR2IR36

HD OVer Coax 2mp 1080p IR Bullet w/ 3.6mm lens

- IP66 Weatherproof rating
- 1/2.8 inch Progressive Scan CMOS
- Adopt HDTVI Technology
- Up to 60 foot IR distance




Megapixels:	2MP
Image Resolutions:	2MP (1920x1080) / 1.3M (1280x960) / 720P (1280x720) / D1 (704x576/704x480)
Image Sensor:	1/2.8 inch Progressive Scan CMOS
Min Illumination:	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
LEDs:	N/A
IR Distance:	60 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F
Dimension:	2.75in x 2.75in x 5.89in
Power:	12v DC

TVIOB-PR2IR36

HD1080P IR Bullet Camera


TURBO HD

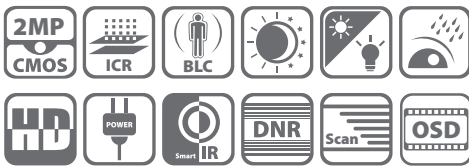

Key features

- HD1080P Video Output
- Adopt HDTVl Technology
- True Day/Night, Smart IR
- 20m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

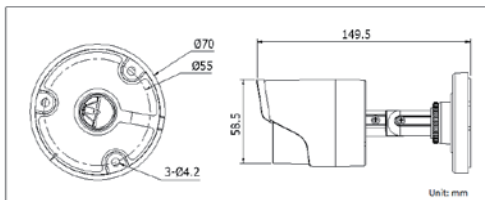

TVIOB-PR2IR36	
Camera	
Image Sensor	2 MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1 / 25(1 / 30) s to 1 / 50,000 s
Lens	3.6mm
	Angle of View: 84.3°(3.6mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25fps / 1080p @ 30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
Menu	
AGC	Support
D / N Mode	Color/ BW/ EXT
White Balance	Auto/ Manual
BLC	Support
Language	English/ Chinese
Functions	Digital noise reduction, Mirror
General	
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 3W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	Φ 70×149.5 mm (Φ 2.76" ×5.89")
Weight	360g (0.79 lb)