

TVIOB-PR5EXIR

5MP Prime HD-TVI EXIR Bullet Camera w/3.6mm Lens

- HD-TVI Technology
- 3.6mm Fixed Lens
- IP67 ingress protection
- Up to 65 feet IR with EXIR



Megapixels:	5MP
Max Resolution:	2592 x 1944
Image Resolutions:	5MP (2592 x 1944)
Image Sensor:	5MP CMOS Image Sensor
Min Illumination:	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
LEDs:	2
IR Distance:	65 feet
OSD:	Yes
Operating Temperature	-40° F to 140° F, humidity: 90% or less (non-condensation)
Dimension:	6.42in x 2.40in x 2.28in
Power:	12V DC ±30%



TVIOB-PR5EXIR


5 MP EXIR Bullet Camera

Specifications

Camera	
Image Sensor	5 MP CMOS image sensor
Resolution	2592 (H) × 1944 (V)
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	3.6 mm fixed focal lens
Horizontal Field of View	70.1°
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 90°; Rotate: 0° to 360°
Synchronization	Internal synchronization
Frame Rate	2592 × 1944 @ 20fps
HD Video Output	1 HD analog output
Menu	
AGC	Support
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Support
Language	English, Chinese
Functions	Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 V DC ± 30%
Power Consumption	Max. 5 W
Protection Level	IP67
IR Range	Up to 20 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	58 mm × 61 mm × 163 mm (2.28" × 2.40" × 6.42")
Weight	Approx. 350 g (0.77 lb.)

TVIOB-PR5EXIR

5 MP EXIR Bullet Camera

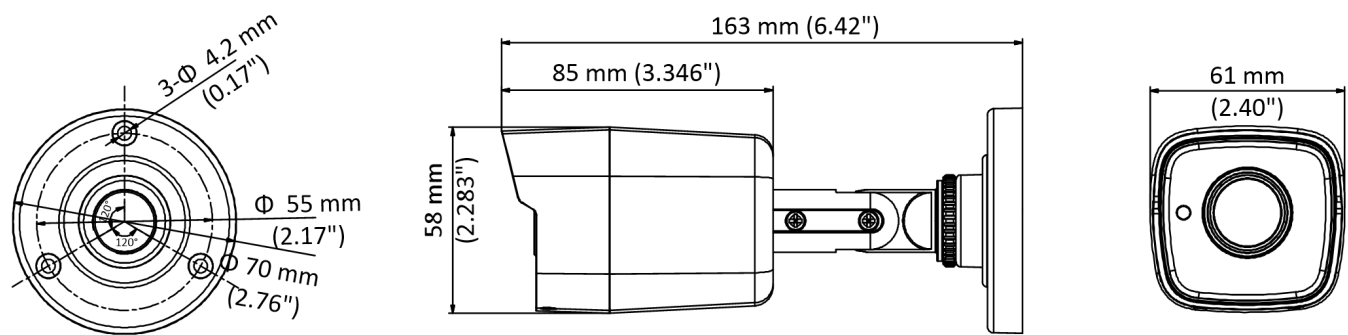

Accessories



JB-PR1280ZJ-XS
Junction Box