


TVIOB-PR5EXIRZ

5MP Prime Motorized Vari-focal EXIR Bullet Camera

- OSD Up The Coax (UTC)
- 2.8-12mm Motorized Varifocal Lens
- Dual Voltage 12V DC / 24V AC
- Up to 131 feet IR EXIR Technology



Megapixels:	5MP
Max Resolution:	2592 x 1944
Image Resolutions:	5MP (2592 x 1944)
Image Sensor:	5 MP CMOS image sensor
Min Illumination:	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
LEDs:	2
IR Distance:	131 feet
OSD:	Yes
Operating Temperature	-40° F to 140° F, humidity: 90% or less (non condensation)
Dimension:	10.61in x 3.62in x 3.34in
Power:	12V DC $\pm$20%, 24V AC $\pm$20%

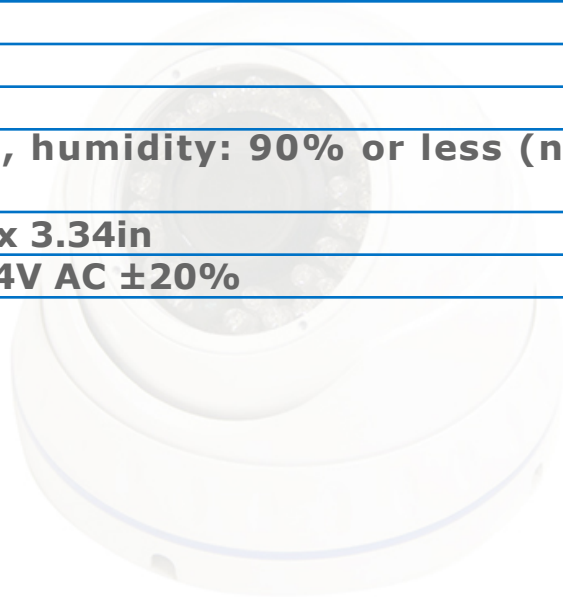

TVIOB-PR5EXIRZ

5 MP Motorized Vari-Focal EXIR Bullet Camera


Specifications

Camera	
Image Sensor	5 MP CMOS image sensor
Effective Pixels	2592 (H) × 1944 (V)
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	2.8 to 12mm motorized vari-focal lens
Horizontal Field of View	86.8° to 27.7° (2.8 to 12 mm)
Lens Mount	Φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°; Tilt:0° to 90°; Rotate: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	2592 × 1944 @ 20fps
HD Video Output	1 HD analog output
Menu	
AGC	Support
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Support
Language	English, Chinese
Functions	Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12V DC ± 20% -A: 12V DC ± 20%, 24V AC ± 20%
Power Consumption	Max. 6 W -A: Max. 9 W
Protection Level	IP67
IR Range	Up to 40 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	92 mm × 84.8 mm × 269.6 mm (3.62" × 3.34" × 10.61")
Weight	Approx. 900 g (1.98 lb.)

TVIOB-PR5EXIRZ

5 MP Motorized Vari-Focal EXIR Bullet Camera

Dimensions

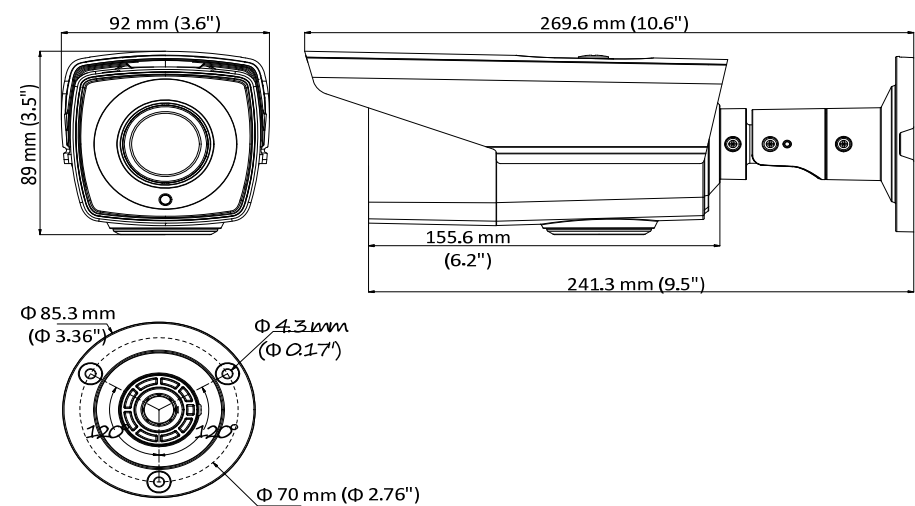

Accessories



PM-PR1275ZJ

Vertical Pole Mounting Bracket