


TVIOD-PR2EXIR28

Prime 2MP Turbo HD True WDR EXIR Dome Camera w/2.8mm Lens

- 2.8mm Fixed Lens
- IP66 ingress protection
- Up to 131 feet IR with EXIR
- True WDR 120dB



Megapixels:	2MP
Max Resolution:	2MP (1928 x 1088)
Image Resolutions:	5MP (1928 x 1088)
Image Sensor:	2MP CMOS image sensor
Min Illumination:	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
LEDs:	2
IR Distance:	131 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F, Humidity 90% or less (non-condensing)
Dimension:	4.33in x 4.33in x 3.67in
Power:	12 VDC±15%

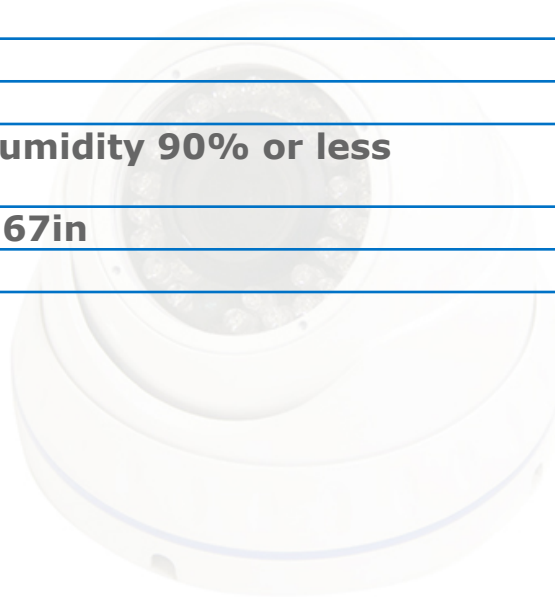


TVIOD-PR2EXIR28

HD1080P WDR EXIR Turret Camera

Specifications

Camera	
Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1928(H)*1088(V)
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	2.8mm
	Angle of View: 103°
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° - 360°; Tilt: 0° - 75°; Rotate: 0° - 360°
Synchronization	Internal Synchronization
WDR	120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	> 62dB
Menu	
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/ MWB
BLC	Support
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR
General	
Operating Conditions	-40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%
Power Consumption	Max. 5W
Protection Level	IP66
IR Range	Up to 40m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	φ110mm×93.2mm (φ4.33"×3.67")
Weight	Approx. 350g (0.77lb)

Dimensions

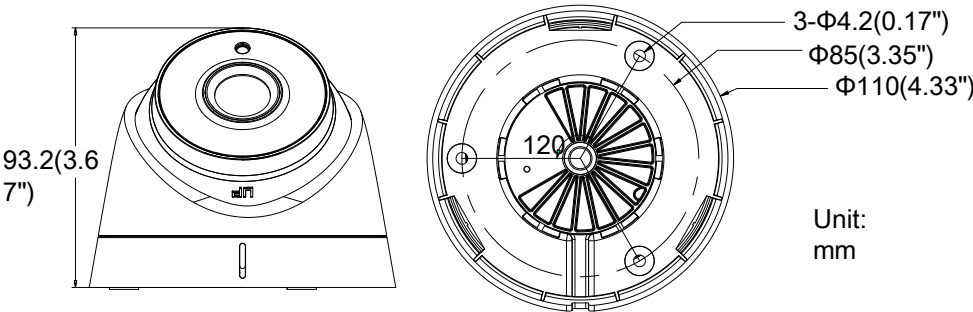

Accessories



1271ZJ-130-TRL