

TVIOD-PR2IR120

HD Over Coax 2MP 1080p IR Dome w/ 120ft IR

- Up to 2MP (1080p) resolution
- Adopt HDTVI Technology
- EXIR Technology
- Up to 120' IR



Megapixels:	2MP
Image Resolutions:	HD Over Coax 2MP 1080p IR Dome w/ 120ft IR
Image Sensor:	2 MP CMOS Image Sensor
Min Illumination:	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
LEDs:	N/A
IR Distance:	120 feet
OSD:	Yes
Operating Temperature	-40°F to +140°F
Dimension:	4.33 in x 4.33 in x 3.67 in
Power:	12V DC


TVIOD-PR2IR120

HD1080P EXIR Turret Camera

TURBO HD




EXIR

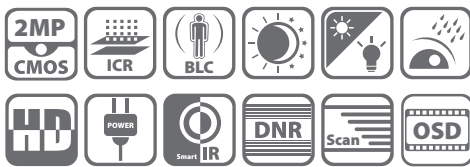

Key features

- HD1080P Video Output
- Adopt HDTV I Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

Dimensions

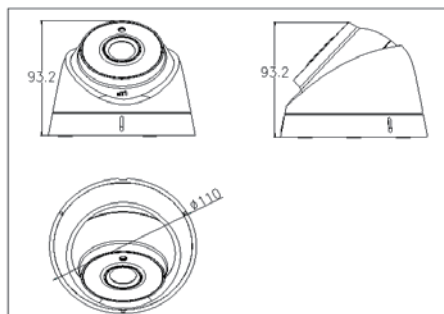

	TVIOD-PR2IR120
Camera	
Image Sensor	2 MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	3.6mm
	Angle of View: 84.3°
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
Menu	
AGC	Support
D/N Mode	Color/ BW/ EXT
White Balance	Auto/ Manual
BLC	Support
Language	English/Chinese
Function	Digital noise reduction, Mirror
General	
Working Temperature / Humidity	-40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 3.5W
Weather Proof Ratings	IP66
IR Range	Up to 120 feet
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	Φ 110 × 93.2 mm(Φ 4.33" × 3.67")
Weight	260g (0.57 lb)